

The image displays two technical drawings of a mechanical component. The left drawing is a front view showing a square base with a central circular hole. The right drawing is a side view showing the profile of the component with a central cylindrical section.

Front View Dimensions:

- Top corner chamfer: 0.5 SQ. (.020 SQ.)
- Distance from top edge to centerline: 2.04 (.080)
- Distance from centerline to bottom edge: 3.5 SQ. (.138 SQ.)

Side View Dimensions:


- Left flange thickness: 0.5 (.020)
- Distance from left flange to right flange: 5.2 (.205)
- Total length: 7.5 (.295)
- Inner diameter: $\varnothing 2.3$ ($\varnothing .091$)
- Outer diameter: $\varnothing 3.2$ ($\varnothing .126$)

CABLE ASSEMBLY INSTRUCTION

SMA0403-0085

JYE BAO CO., LTD.

A




BODY

DIAGRAM

ASSEMBLY INSTRUCTION



Step 1: STRIP AS SHOWN .

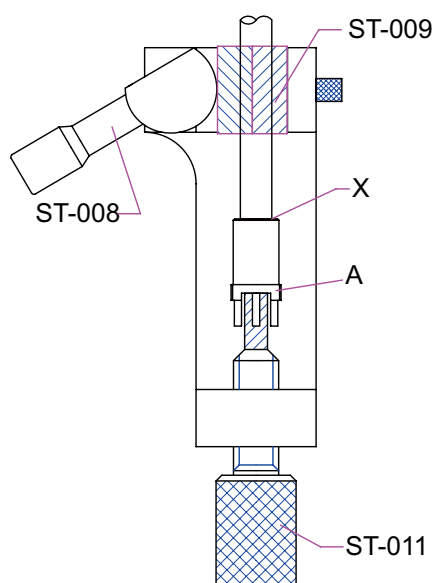

Step 2: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.