



SMA9300L-0085

SMA Reverse Polarity Jack Solder For Bulkhead 50Ω

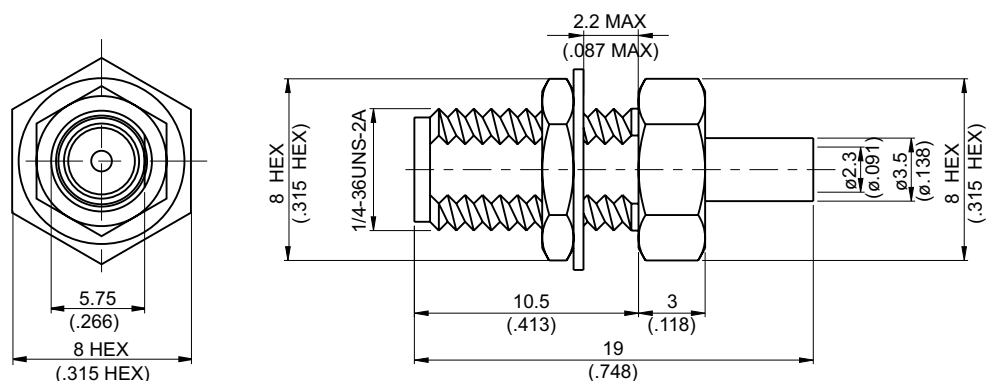

MOUNTING HOLE :



Parts	Material	Plating (Micro-inch)
Hex Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50
Lock Washer	Brass	Gold 5 Over Nickel 50 Over Copper 50
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Gold 5 Over Nickel 50 Over Copper 50

Weight: 3.57 g

Suitable Cables: Semi-rigid.085


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

SMA9300L-0085

JYE BAO CO., LTD.

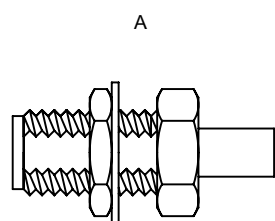

BODY+HEX NUT
+LOCK WASHER




CONTACT PIN




INSULATOR

DIAGRAM


ASSEMBLY INSTRUCTION




Step 1: STRIP AS SHOWN .

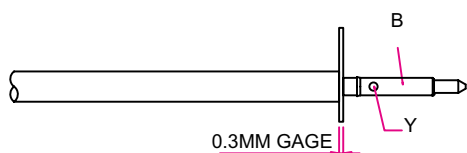

Step 2: PUT 0.3 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y " .

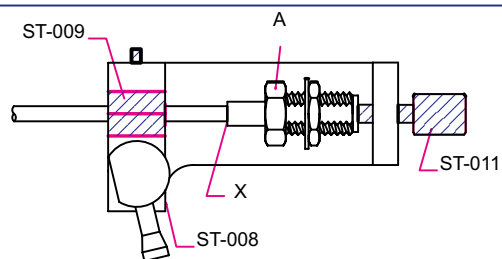

Step 3: INSERT PREPARED CABLE INTO CONNECTOR BODY " A " AND USE SOLDERING FIXTURE " ST-008 " , INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X " .

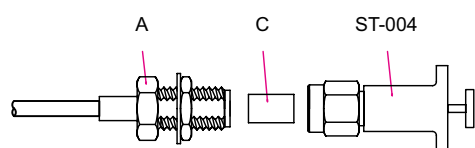

Step4: USE DIELECTRIC INSERTION TOOL " ST-004 " TO INSERT THE TEFLON " A " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.