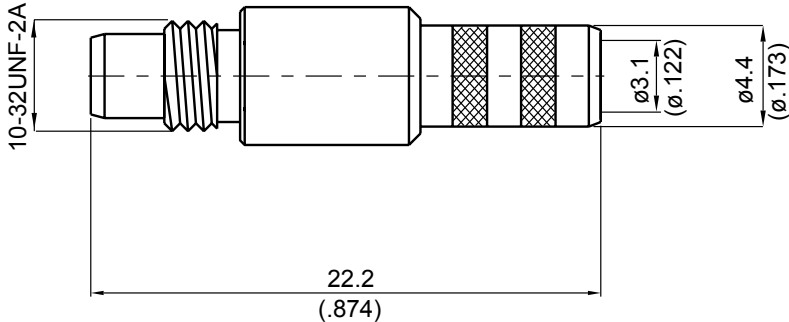


SMC8100-0142	SMC Jack Crimp For RG142, RG400; 4GHz VSWR 1.2	50Ω																		
																				
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Contact Pin</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Barrel</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Barrel	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20		
Parts	Material	Plating (Micro-inch)																		
Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Insulator	Teflon																			
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Barrel	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Suitable Cables: RG142, RG400																				

This part number complies with RoHS.


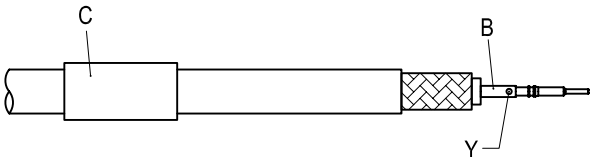
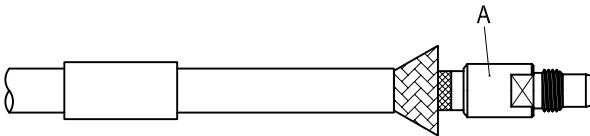
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SMC	SMC8100-0142
Interface MIL-STD-348B	
Electrical Data Impedance 50Ω Frequency range DC to 4GHz VSWR ≤ 1.2 (DC to 4GHz) Insertion loss $\leq 0.1 \times \sqrt{f(\text{GHz})}\text{dB}$ Insulation resistance $\geq 10000\text{M}\Omega$ Contact resistance inner conductor $\leq 5\text{m}\Omega$ Contact resistance outer conductor $\leq 2.5\text{m}\Omega$ Dielectric withstanding voltage (at sea level) 750 V rms Working voltage (at sea level) 250 V rms RF leakage $\geq 90\text{dB}$ to 1GHz	
Mechanical Data Recommended coupling nut torque 2.2 to 3.1 inch lbs Coupling proof torque 6.2 inch lbs Contact captivation-axial ≥ 2.25 lbs Durability (mating) ≥ 500	
Environmental Data Temperature range -65°C to +165°C Thermal shock MIL-STD-202, Method 107, Condition B Moisture resistance MIL-STD-202, Method 106 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	
Tooling Crimping tool CRT-1 or CRT-2 Crimp insert INSERT-B	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SMC8100-0142		DATE	2017/03/27	REV	—
A		B		C	
					
BODY		CONTACT PIN		FERRULE	
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y ". (USE SQUARE 0.98mm/0.039inch SECTION OF INSERT-B IF CRIMPED)		
			Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.		
			Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 5.5mm/0.217inch HEX SECTION OF INSERT-B)		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

SMC8100-0142

