
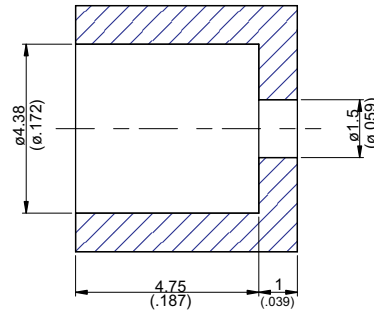


SMP350P-LD48

Press Fit SMP Plug Limited Detent Bulkhead With Round Contact ($\Phi 0.46$; L=2); PTFE L=1; 11GHz VSWR 1.2 **50 Ω**

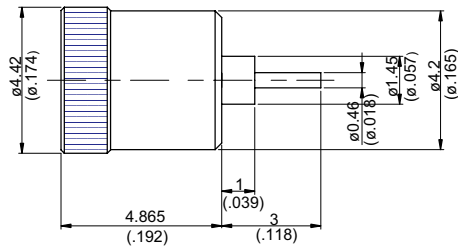

PANEL CUT OUT

Parts	Material	Plating (Micro-inch)
Center Pin	Brass	Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SMP	SMP350P-LD48																						
<div style="border: 1px solid black; padding: 2px;">Interface</div> MIL-STD-348B																							
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency range VSWR Insertion loss Insulation resistance Contact resistance inner conductor Contact resistance outer conductor Dielectric withstanding voltage (at sea level) Working Voltage (at sea level) RF-Leakage	50Ω DC to 11GHz ≤ 1.2 (DC to 11GHz) ≤ .06 x √f(GHz) dB ≥ 5000 MΩ ≤ 6mΩ ≤ 2mΩ 500 335 ≥ 80dB (3GHz); ≥ 65dB (3~26.5GHz)																						
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Engagement force Disengagement force Durability (mating) Axial misalignment Radial misalignment	<table border="1"> <thead> <tr> <th>Full Detent</th> <th>Limited Detent</th> <th>Smooth bore & catchers mit</th> <th></th> </tr> </thead> <tbody> <tr> <td>≤ 15</td> <td>≤ 10</td> <td>≤ 2</td> <td>lbs</td> </tr> <tr> <td>≥ 5</td> <td>≥ 2</td> <td>≥ 0.5</td> <td>lbs</td> </tr> <tr> <td>≥ 100</td> <td>≥ 500</td> <td>≥ 1000</td> <td></td> </tr> </tbody> </table>	Full Detent	Limited Detent	Smooth bore & catchers mit		≤ 15	≤ 10	≤ 2	lbs	≥ 5	≥ 2	≥ 0.5	lbs	≥ 100	≥ 500	≥ 1000		<table border="1"> <tbody> <tr> <td colspan="2">+ 0.00 / -0.25 (+.000 / -.010)</td> </tr> <tr> <td colspan="2">±0.25 (0.010)</td> </tr> </tbody> </table>		+ 0.00 / -0.25 (+.000 / -.010)		±0.25 (0.010)	
Full Detent	Limited Detent	Smooth bore & catchers mit																					
≤ 15	≤ 10	≤ 2	lbs																				
≥ 5	≥ 2	≥ 0.5	lbs																				
≥ 100	≥ 500	≥ 1000																					
+ 0.00 / -0.25 (+.000 / -.010)																							
±0.25 (0.010)																							
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature range Thermal shock Moisture resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 106 MIL-STD-202, Method 101, Condition B Compliant																						
<div style="border: 1px solid black; padding: 2px;">Tooling</div>																							