


SSMA8F26E-0012

SSMA Field Replaceable Plug,
 $\phi 12.2\text{mm}$ (.480inch) 2 Hole Flange With EMI Gasket,
 Accepts 0.3mm (.012inch) pin, 27GHz VSWR 1.2

50 Ω

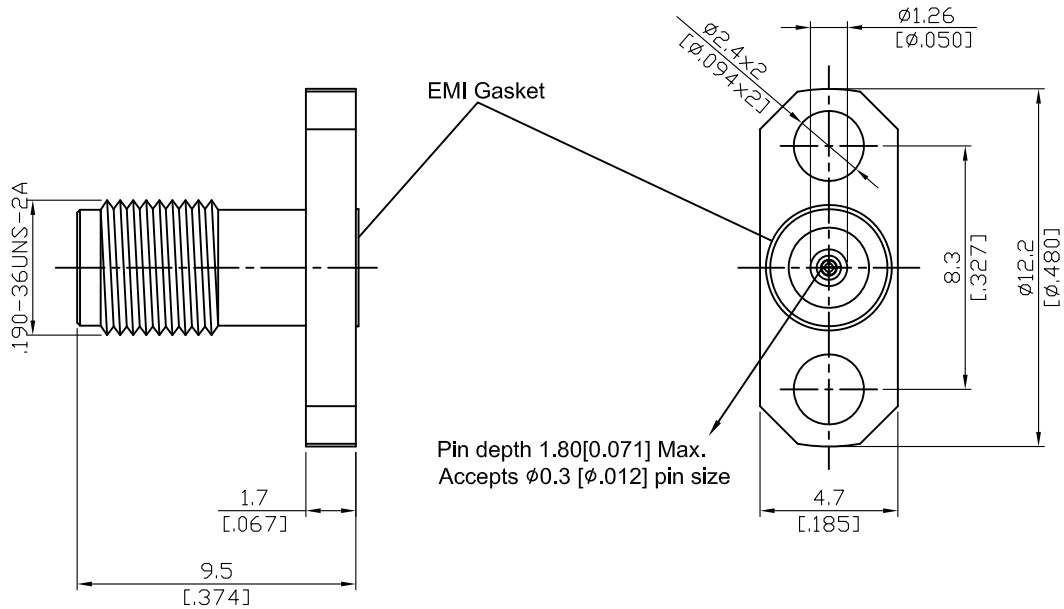

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Stainless Steel	Passivated
EMI Gasket	Conductive Silicone Elastomers	

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SSMA	SSMA8F26E-0012																		
<div data-bbox="113 300 513 349" style="border: 1px solid black; padding: 2px;">Interface</div> <p>MIL-STD-348B</p>																			
<div data-bbox="113 461 513 510" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Impedance</td> <td style="width: 50%;">50Ω</td> </tr> <tr> <td>Frequency range</td> <td>DC to 27GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.2 (DC to 27GHz)</td> </tr> <tr> <td>Insertion loss</td> <td>≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td>Insulation resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Contact resistance inner conductor</td> <td>≤ 4mΩ</td> </tr> <tr> <td>Contact resistance outer conductor</td> <td>≤ 2.5mΩ</td> </tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td> <td>750 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>250 V rms</td> </tr> </table>		Impedance	50Ω	Frequency range	DC to 27GHz	VSWR	≤ 1.2 (DC to 27GHz)	Insertion loss	≤ 0.06 x √f(GHz) dB	Insulation resistance	≥ 5000MΩ	Contact resistance inner conductor	≤ 4mΩ	Contact resistance outer conductor	≤ 2.5mΩ	Dielectric withstanding voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms
Impedance	50Ω																		
Frequency range	DC to 27GHz																		
VSWR	≤ 1.2 (DC to 27GHz)																		
Insertion loss	≤ 0.06 x √f(GHz) dB																		
Insulation resistance	≥ 5000MΩ																		
Contact resistance inner conductor	≤ 4mΩ																		
Contact resistance outer conductor	≤ 2.5mΩ																		
Dielectric withstanding voltage (at sea level)	750 V rms																		
Working Voltage (at sea level)	250 V rms																		
<div data-bbox="113 1003 513 1052" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Recommended coupling nut torque</td> <td style="width: 50%;">5.3 to 7.1 inch lbs</td> </tr> <tr> <td>Coupling proof torque</td> <td>7.5 inch lbs</td> </tr> <tr> <td>Coupling nut retention force</td> <td>≥ 22.5 lbs</td> </tr> <tr> <td>Contact captivation-axial</td> <td>≥ 5 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 500</td> </tr> </table>		Recommended coupling nut torque	5.3 to 7.1 inch lbs	Coupling proof torque	7.5 inch lbs	Coupling nut retention force	≥ 22.5 lbs	Contact captivation-axial	≥ 5 lbs	Durability (mating)	≥ 500								
Recommended coupling nut torque	5.3 to 7.1 inch lbs																		
Coupling proof torque	7.5 inch lbs																		
Coupling nut retention force	≥ 22.5 lbs																		
Contact captivation-axial	≥ 5 lbs																		
Durability (mating)	≥ 500																		
<div data-bbox="113 1406 513 1456" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Temperature range</td> <td style="width: 50%;">-40°C to +125°C</td> </tr> <tr> <td>Thermal shock</td> <td>MIL-STD-202, Method 107, Condition A</td> </tr> <tr> <td>Moisture resistance</td> <td>MIL-STD-202, Method 106</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table>		Temperature range	-40°C to +125°C	Thermal shock	MIL-STD-202, Method 107, Condition A	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-40°C to +125°C																		
Thermal shock	MIL-STD-202, Method 107, Condition A																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
<div data-bbox="113 1758 513 1807" style="border: 1px solid black; padding: 2px;">Tooling</div>																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.