


| | | |
|---------------|--|-----|
| TH-2.4-FF-50G | 2.4mm Jack To 2.4mm Jack Phase Matched Adaptor 50GHz 23dB | 50Ω |
|---------------|--|-----|

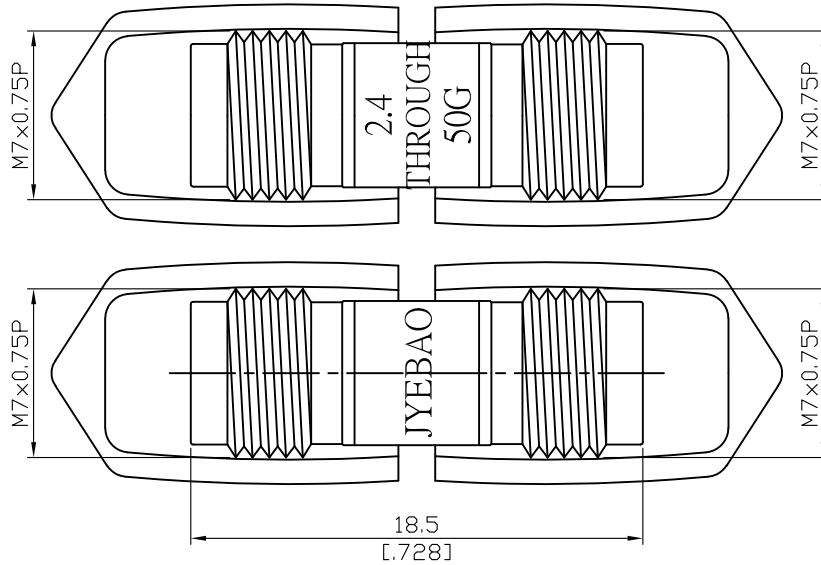

| THROUGH ADAPTOR | | |
|------------------------|------------|--------|
| FREQUENCY RANGE | DC-50GHz | |
| IMPEDANCE | 50Ω | |
| INSERTION LOSS | ≤ 0.30dB | |
| ELECTRICAL LENGTH (mm) | 13.0±0.12 | |
| RETURN LOSS | DC-4GHz | ≥ 30dB |
| | 4-26.5GHz | ≥ 26dB |
| | 26.5-50GHz | ≥ 23dB |

Notes:

1. Temperature range for optimal results: +20 °C to +26 °C
2. Storage temperature range: -20 °C to +75°C
3. When not in use put on cap to keep connector clean
4. Return loss test results shipped along with goods

| Parts | Material | Plating (Micro-inch) |
|-------------|------------------|---|
| Contact Pin | Beryllium Copper | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Insulator | PPO | |
| Body | Stainless Steel | Passivated |
| Cap | PVC | |

| | |
|--|--|
| | |
|--|--|

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.