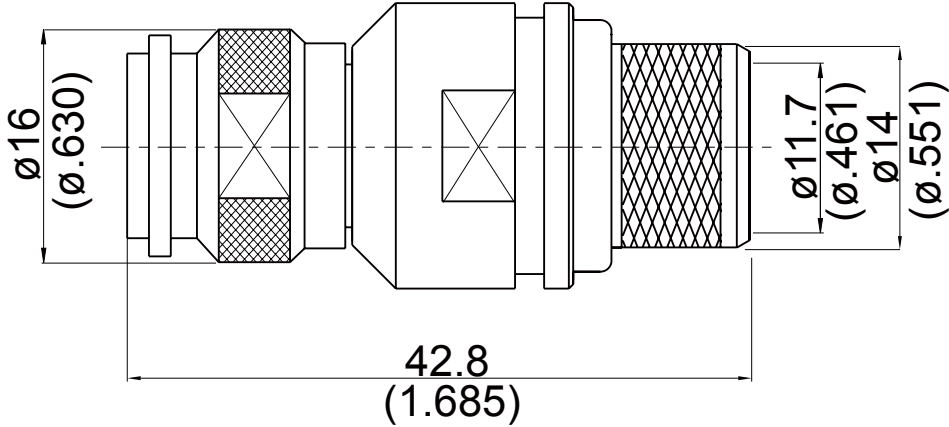


TNC3100-L600	TNC plug crimp for JBY600,LMR600; 2.5GHz VSWR 1.25		50Ω																											
																														
<table><tr><th>Parts</th><th>Material</th><th>Plating(Micro-inch)</th></tr><tr><td>Ferrule</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Barrel</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Retainer Ring</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicon</td><td></td></tr><tr><td>Contact Pin</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Insulator</td><td>Teflon</td><td></td></tr><tr><td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Coupling Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>				Parts	Material	Plating(Micro-inch)	Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating(Micro-inch)																												
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																												
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																												
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																												
Gasket	Silicon																													
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																												
Insulator	Teflon																													
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																												
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																												
Weight: 47 g																														
Suitable Cables: LMR600, JBY600																														

This part number complies with RoHS.







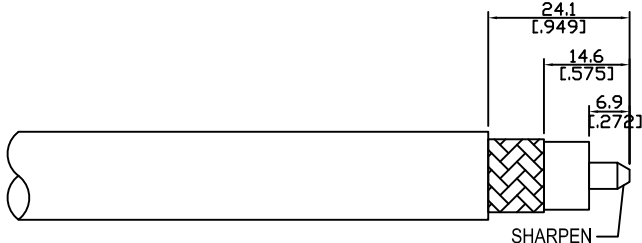
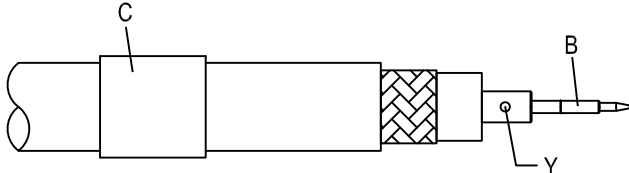
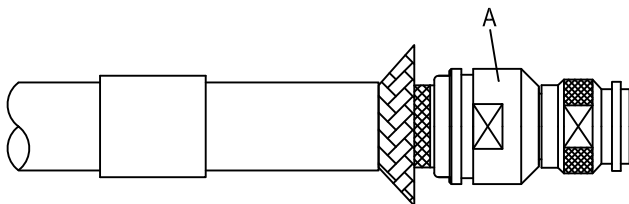
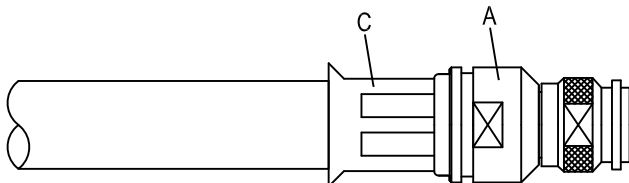
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

TNC	TNC3100-L600
Interface MIL-STD-348B	
Electrical Data Impedance 50Ω Frequency range DC to 2.5GHz VSWR ≤ 1.25 (DC to 2.5GHz) Insertion loss $\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB Insulation resistance $\geq 5000\text{M}\Omega$ Contact resistance inner conductor $\leq 1.5\text{m}\Omega$ Contact resistance outer conductor $\leq 1\text{m}\Omega$ Dielectric withstanding voltage (at sea level) 1500 V rms Working voltage (at sea level) 500 V rms	
Mechanical Data Recommended coupling nut torque 4.1 to 6.1 inch lbs Coupling proof torque 15 inch lbs Coupling nut retention force ≥ 101.2 lbs Contact captivation-axial ≥ 6.1 lbs Durability (mating) ≥ 500	
Environmental Data Temperature range -65°C to +165°C Thermal shock MIL-STD-202, Method 107, Condition B Moisture resistance MIL-STD-202, Method 106 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	
Tooling Crimping tool CRT-3 Crimp insert INSERT-FA	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

TNC3100-L600		DATE	2014/04/29	REV	—									
<table><tr><td>A</td><td>B</td><td>C</td></tr><tr><td></td><td></td><td></td></tr><tr><td>BODY</td><td>CONTACT PIN</td><td>FERRULE</td></tr></table>						A	B	C				BODY	CONTACT PIN	FERRULE
A	B	C												
														
BODY	CONTACT PIN	FERRULE												
DIAGRAM			ASSEMBLY INSTRUCTION											
			Step 1: STRIP AS SHOWN. Step 2: SHARPEN CENTER CONDUCTOR TIP.											
			Step 3: SLIDE FERRULE " C " OVER CABLE. Step 4: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ".											
			Step 5: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.											
			Step 6: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 15.5mm/0.610inch HEX SECTION OF INSERT-FA)											
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.														
APPROVED		CHECKED		DRAWING										
				Albert										

TNC3100-L600

S11

