



| | | |
|--------------|--|-----|
| TNC8900-0002 | 2 Watt 50ohm TNC Jack Termination 2GHz VSWR 1.2 | 50Ω |
|--------------|--|-----|

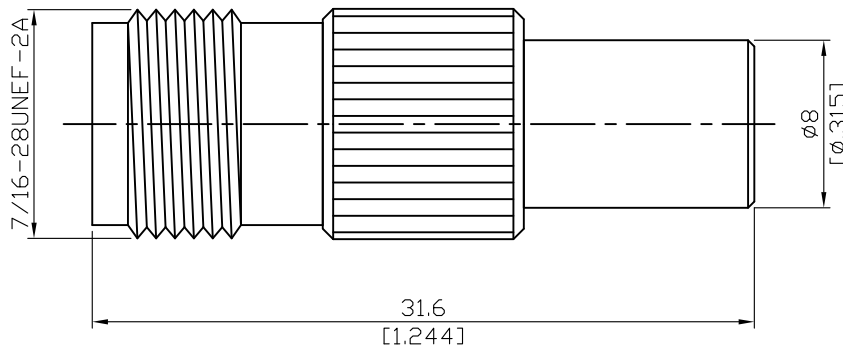

2W average power from -55°C to +70°C linearly derated to 1 Watt at 165°C

| Parts | Material | Plating (Micro-inch) |
|--------------|-----------------|---|
| Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin | Phosphor Bronze | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Insulator | Teflon | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

| | |
|----------------|--|
| Weight: 12.62g | |
|----------------|--|

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

| TNC | TNC8900-0002 | | | | | | | | | | | | | | | | | | |
|--|--------------------------------------|---------------------------------|---------------------|-----------------------|--------------------------------------|------------------------------|-------------------------|---------------------------|--------------------------------------|-----------------------|-----------|------------------------------------|---------|------------------------------------|-------|--|------------|--------------------------------|-----------|
| <div data-bbox="167 344 568 389" style="border: 1px solid black; padding: 2px;">Interface</div> <p>MIL-STD-348B</p> | | | | | | | | | | | | | | | | | | | |
| <div data-bbox="167 512 568 557" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Impedance</td> <td style="width: 50%;">50Ω</td> </tr> <tr> <td>Frequency range</td> <td>DC to 2GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.2 (DC to 2GHz)</td> </tr> <tr> <td>Insertion loss</td> <td>≤ 0.1 x √f(GHz) dB</td> </tr> <tr> <td>Insulation resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Contact resistance inner conductor</td> <td>≤ 1.5mΩ</td> </tr> <tr> <td>Contact resistance outer conductor</td> <td>≤ 1mΩ</td> </tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td> <td>1500 V rms</td> </tr> <tr> <td>Working voltage (at sea level)</td> <td>500 V rms</td> </tr> </table> | | Impedance | 50Ω | Frequency range | DC to 2GHz | VSWR | ≤ 1.2 (DC to 2GHz) | Insertion loss | ≤ 0.1 x √f(GHz) dB | Insulation resistance | ≥ 5000MΩ | Contact resistance inner conductor | ≤ 1.5mΩ | Contact resistance outer conductor | ≤ 1mΩ | Dielectric withstanding voltage (at sea level) | 1500 V rms | Working voltage (at sea level) | 500 V rms |
| Impedance | 50Ω | | | | | | | | | | | | | | | | | | |
| Frequency range | DC to 2GHz | | | | | | | | | | | | | | | | | | |
| VSWR | ≤ 1.2 (DC to 2GHz) | | | | | | | | | | | | | | | | | | |
| Insertion loss | ≤ 0.1 x √f(GHz) dB | | | | | | | | | | | | | | | | | | |
| Insulation resistance | ≥ 5000MΩ | | | | | | | | | | | | | | | | | | |
| Contact resistance inner conductor | ≤ 1.5mΩ | | | | | | | | | | | | | | | | | | |
| Contact resistance outer conductor | ≤ 1mΩ | | | | | | | | | | | | | | | | | | |
| Dielectric withstanding voltage (at sea level) | 1500 V rms | | | | | | | | | | | | | | | | | | |
| Working voltage (at sea level) | 500 V rms | | | | | | | | | | | | | | | | | | |
| <div data-bbox="167 1057 568 1102" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Recommended coupling nut torque</td> <td style="width: 50%;">4.1 to 6.1 inch lbs</td> </tr> <tr> <td>Coupling proof torque</td> <td>15 inch lbs</td> </tr> <tr> <td>Coupling nut retention force</td> <td>≥ 101.2 lbs</td> </tr> <tr> <td>Contact captivation-axial</td> <td>≥ 6.1 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 500</td> </tr> </table> | | Recommended coupling nut torque | 4.1 to 6.1 inch lbs | Coupling proof torque | 15 inch lbs | Coupling nut retention force | ≥ 101.2 lbs | Contact captivation-axial | ≥ 6.1 lbs | Durability (mating) | ≥ 500 | | | | | | | | |
| Recommended coupling nut torque | 4.1 to 6.1 inch lbs | | | | | | | | | | | | | | | | | | |
| Coupling proof torque | 15 inch lbs | | | | | | | | | | | | | | | | | | |
| Coupling nut retention force | ≥ 101.2 lbs | | | | | | | | | | | | | | | | | | |
| Contact captivation-axial | ≥ 6.1 lbs | | | | | | | | | | | | | | | | | | |
| Durability (mating) | ≥ 500 | | | | | | | | | | | | | | | | | | |
| <div data-bbox="167 1413 568 1458" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Temperature range</td> <td style="width: 50%;">-55°C to +165°C</td> </tr> <tr> <td>Thermal shock</td> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture resistance</td> <td>MIL-STD-202, Method 106</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table> | | Temperature range | -55°C to +165°C | Thermal shock | MIL-STD-202, Method 107, Condition B | Moisture resistance | MIL-STD-202, Method 106 | Corrosion | MIL-STD-202, Method 101, Condition B | RoHS | Compliant | | | | | | | | |
| Temperature range | -55°C to +165°C | | | | | | | | | | | | | | | | | | |
| Thermal shock | MIL-STD-202, Method 107, Condition B | | | | | | | | | | | | | | | | | | |
| Moisture resistance | MIL-STD-202, Method 106 | | | | | | | | | | | | | | | | | | |
| Corrosion | MIL-STD-202, Method 101, Condition B | | | | | | | | | | | | | | | | | | |
| RoHS | Compliant | | | | | | | | | | | | | | | | | | |
| <div data-bbox="167 1765 568 1809" style="border: 1px solid black; padding: 2px;">Tooling</div> | | | | | | | | | | | | | | | | | | | |

Notice: JYEBAO reserves the right to make modifications deemed appropriate.