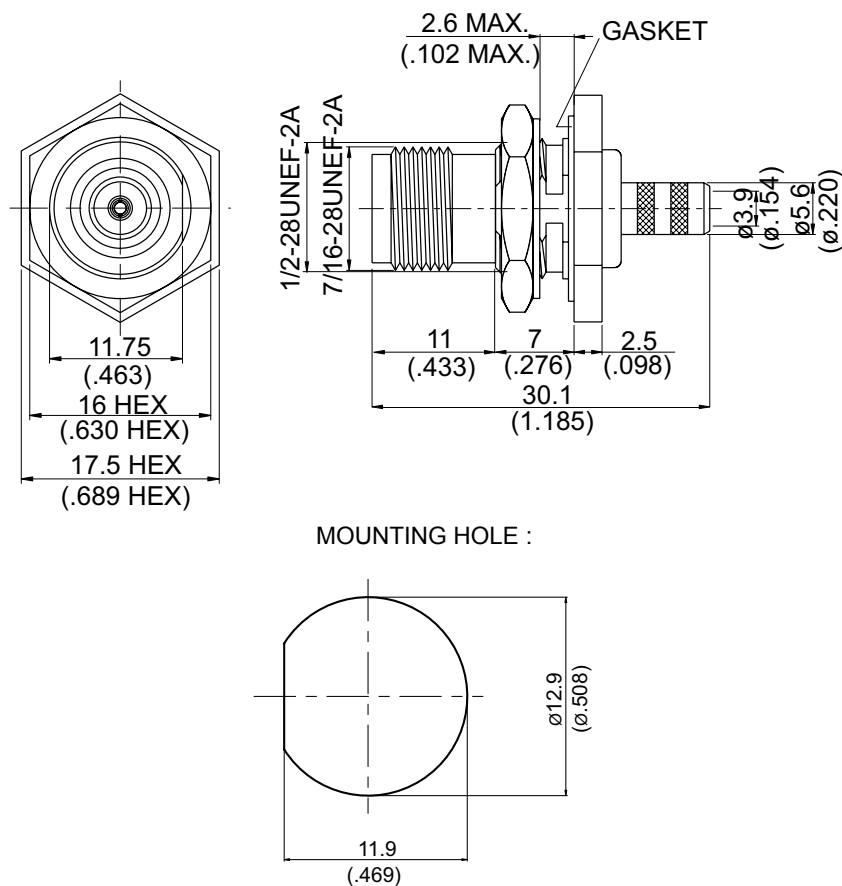


TNC9105-0059

TNC Reverse Polarity Jack Crimp For Bulkhead 75Ω



| Parts      | Material | Plating (Micro-inch)                     |
|------------|----------|------------------------------------------|
| Ferrule    | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Center Pin | Brass    | Gold 3 Over Nickel 50 Over Copper 50     |
| Hex Nut    | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Washer     | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Gasket     | Silicon  |                                          |
| Barrel     | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Insulator  | Teflon   |                                          |
| Body       | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

Weight:


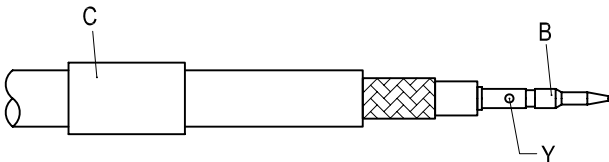
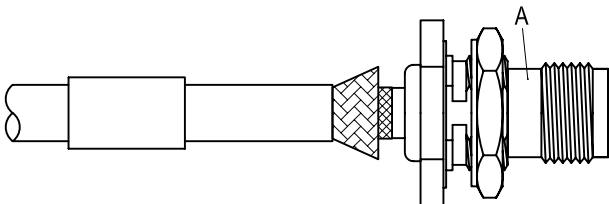
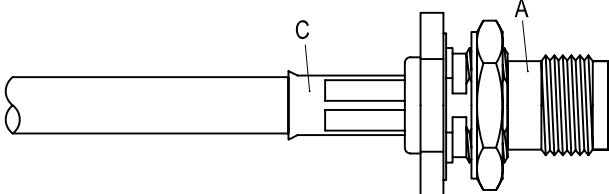
Suitable Cables: RG59

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# JYE BAO CO., LTD.

## CABLE ASSEMBLY INSTRUCTION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |         |                                                                                                                                                                                   |         |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---|
| TNC9105-0059                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  | DATE    | 2016/04/18                                                                                                                                                                        | REV     | — |
| <div><div><div>A</div><div></div><div>BODY + GASKET +<br/>WASHER + HEX NUT</div></div><div><div>B</div><div></div><div>CONTACT PIN</div></div><div><div>C</div><div></div><div>FERRULE</div></div></div> |  |         |                                                                                                                                                                                   |         |   |
| DIAGRAM                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |         | ASSEMBLY INSTRUCTION                                                                                                                                                              |         |   |
|                                                                                                                                                                                                                                                                                                                                                                             |  |         | Step 1: STRIP AS SHOWN.                                                                                                                                                           |         |   |
|                                                                                                                                                                                                                                                                                                                                                                            |  |         | Step 2: SLIDE FERRULE " C " OVER CABLE.<br>Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y ".<br>(USE SQUARE 1.6mm/0.063inch SECTION OF INSERT-E IF CRIMPED) |         |   |
|                                                                                                                                                                                                                                                                                                                                                                            |  |         | Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.                                                                                                                       |         |   |
|                                                                                                                                                                                                                                                                                                                                                                            |  |         | Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP.<br>(USE 6.5mm/0.256inch HEX SECTION OF INSERT-E)                                                               |         |   |
| This part number complies with RoHS.<br>Notice: JYEBAO reserves the right to make modifications deemed appropriate.                                                                                                                                                                                                                                                                                                                                           |  |         |                                                                                                                                                                                   |         |   |
| APPROVED                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | CHECKED |                                                                                                                                                                                   | DRAWING |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |         |                                                                                                                                                                                   | Albert  |   |