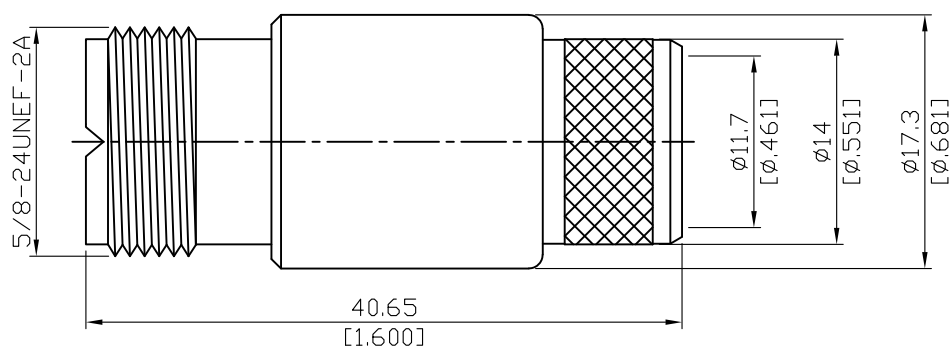


UHF81EZ-L600

UHF Jack Crimp For JBY600, LMR600
300MHz VSWR 1.2

50Ω



Parts	Material	Plating (Micro-inch)
Ferrule	Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Suitable Cables: JBY600, LMR600

This part number complies with RoHS.





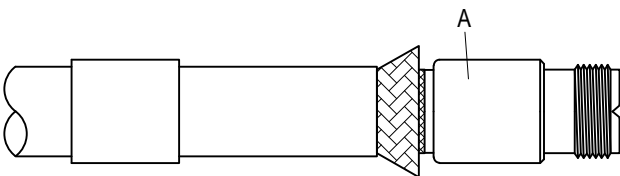
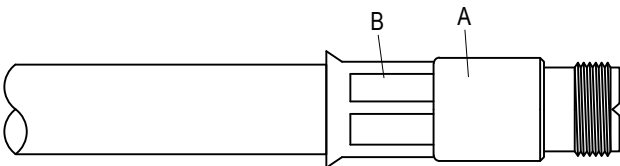
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

UHF	UHF81EZ-L600
Interface	
IEC 60169-12	
Electrical Data	
Impedance	Non constant
Frequency range	300MHz
VSWR	≤ 1.2 (DC to 300MHz)
Insulation resistance	$\geq 5000M\Omega$
Contact resistance inner conductor	$\leq 5m\Omega$
Contact resistance outer conductor	$\leq 3m\Omega$
Dielectric withstanding voltage (at sea level)	2000 V rms
Working Voltage (at sea level)	750 V rms
Power Handling	400W (300MHz)
Environmental Data	
Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Moisture resistance	MIL-STD-202, Method 106
Corrosion	MIL-STD-202, Method 101, Condition B
RoHS	
Tooling	
Crimping tool	CRT-3
Crimp insert	INSERT-FA

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

UHF81EZ-L600		DATE	2016/07/20	REV	—
A B   BODY FERRULE		NOTE: THE STRIPPED CABLE AND POINTED CENTER CONDUCTOR MUST BE STRAIGHT (180°), IF NOT LEAVES WILL BREAK EASILY. NG  OK 			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
 SHARPEN		Step 2: SHARPEN CENTER CONDUCTOR TIP. Step 3: SLIDE FERRULE " B " OVER CABLE. NOTE: THE STRIPPED CABLE AND POINTED CENTER CONDUCTOR MUST BE STRAIGHT (180°), IF NOT LEAVES WILL BREAK EASILY.			
 A		Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.			
 B A		Step 5: SLIDE FERRULE " B " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 15.5mm/0.610inch HEX SECTION OF INSERT-FA)			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	