


UHF864A-0000

**UHF Jack SQ 25.4mm 4 Hole Flange
With Solder Cup Contact; 300MHz VSWR 1.25**

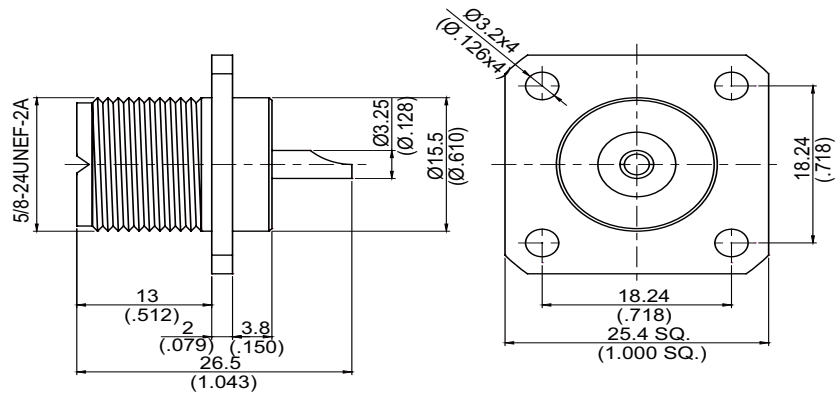

Parts	Material	Plating(Micro-inch)
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

UHF	UHF864A-0000																		
<div data-bbox="118 327 517 376" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="118 383 319 416">IEC 60169-12</p>																			
<div data-bbox="118 490 517 539" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table data-bbox="118 546 1382 965"> <tr> <td>Impedance</td> <td>Non constant</td> </tr> <tr> <td>Frequency range</td> <td>300MHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.25 (DC to 300MHz)</td> </tr> <tr> <td>Insulation resistance</td> <td>$\geq 5000M\Omega$</td> </tr> <tr> <td>Contact resistance inner conductor</td> <td>$\leq 5m\Omega$</td> </tr> <tr> <td>Contact resistance outer conductor</td> <td>$\leq 3m\Omega$</td> </tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td> <td>2000 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>750 V rms</td> </tr> <tr> <td>Power Handling</td> <td>400W (300MHz)</td> </tr> </table>		Impedance	Non constant	Frequency range	300MHz	VSWR	≤ 1.25 (DC to 300MHz)	Insulation resistance	$\geq 5000M\Omega$	Contact resistance inner conductor	$\leq 5m\Omega$	Contact resistance outer conductor	$\leq 3m\Omega$	Dielectric withstanding voltage (at sea level)	2000 V rms	Working Voltage (at sea level)	750 V rms	Power Handling	400W (300MHz)
Impedance	Non constant																		
Frequency range	300MHz																		
VSWR	≤ 1.25 (DC to 300MHz)																		
Insulation resistance	$\geq 5000M\Omega$																		
Contact resistance inner conductor	$\leq 5m\Omega$																		
Contact resistance outer conductor	$\leq 3m\Omega$																		
Dielectric withstanding voltage (at sea level)	2000 V rms																		
Working Voltage (at sea level)	750 V rms																		
Power Handling	400W (300MHz)																		
<div data-bbox="118 1223 517 1272" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table data-bbox="118 1279 1382 1507"> <tr> <td>Temperature range</td> <td>-65°C to +165°C</td> </tr> <tr> <td>Thermal shock</td> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture resistance</td> <td>MIL-STD-202, Method 106</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td></td> </tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS									
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS																			
<div data-bbox="118 1718 517 1767" style="border: 1px solid black; padding: 2px;">Tooling</div>																			