


| NO. | COMPONENTS | IMPEDANCE |
|-----|---------------------------|-----------|
| 1 | SMA REVERSE POLARITY MALE | 50 OHM |
| 2 | RG142 | 50 OHM |
| 3 | HEAT SHRINKING TUBE | |
| 4 | BNC MALE RIGHT ANGLE | 50 OHM |

SMA R/P MALE

BNC MALE
RIGHT ANGLE

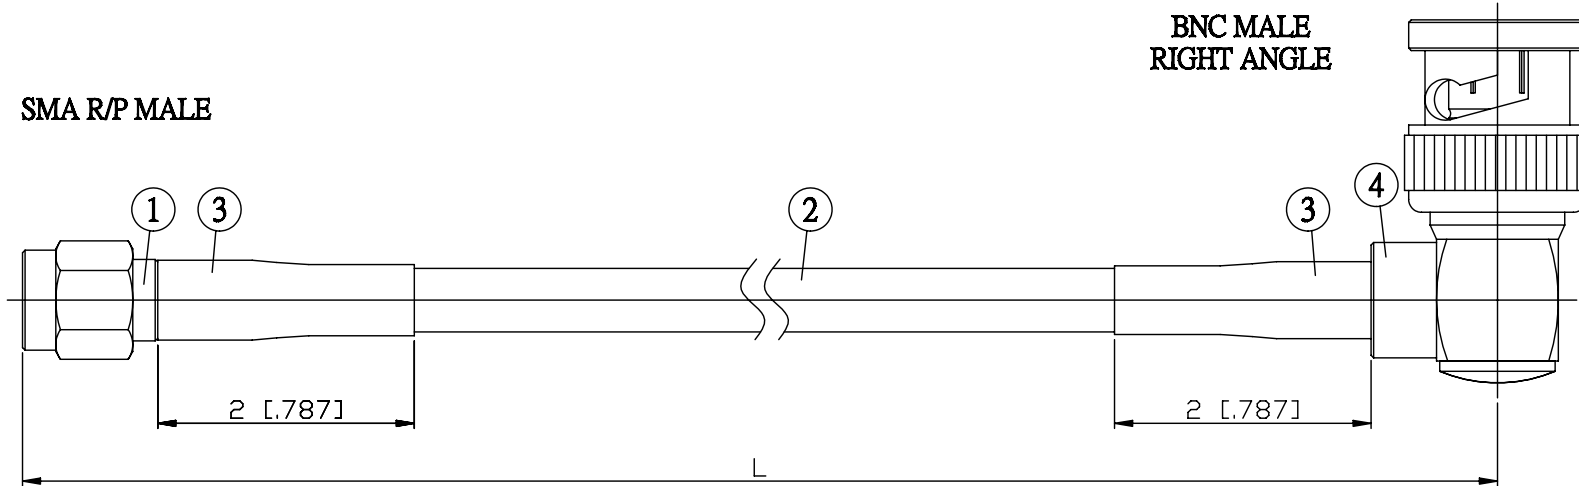

| JYE BAO P/N | L CM (INCH) |
|----------------|------------------------|
| A60B39-142-15 | 15 (5.906) |
| A60B39-142-30 | 30 (11.811) |
| A60B39-142-50 | 50 (19.685) |
| A60B39-142-100 | 100 (39.370) |
| A60B39-142-150 | 150 (59.055) |
| A60B39-142-200 | 200 (78.740) |
| A60B39-142-XXX | CUSTOM LENGTH IN CM |

| | |
|--|--|
| <p>LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.</p> | <p>JYE BAO CO., LTD. TAIPEI TAIWAN</p> |
| | <p>DESCRIPTION CABLE ASSEMBLY SMA R/P PLUG TO BNC PLUG R/A</p> |
| | <p>JYE BAO DRAWING NO. A60B39-142-XXX</p> |