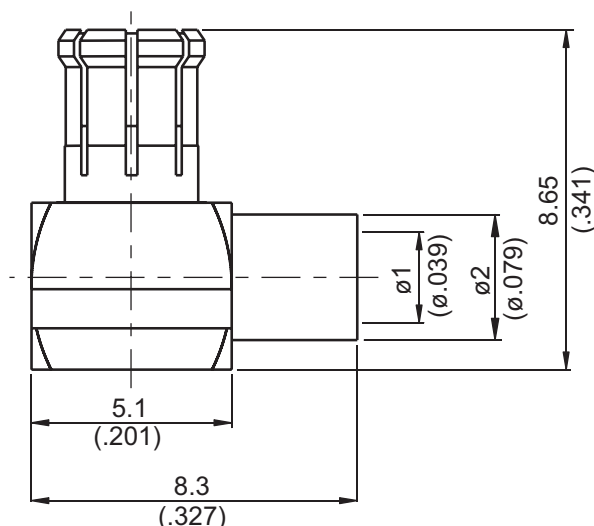


MCX3300-9035

MCX Plug Solder Right Angle 50Ω



Parts	Material	Plating (Micro-inch)
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50
Cover	Brass	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50

Weight:


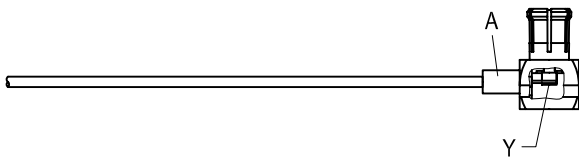
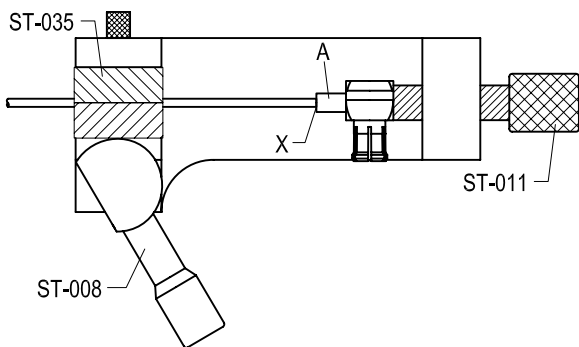
Suitable Cables: Semi-rigid.034

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

MCX3300-9035		DATE	2017/09/25	REV	—
A		B	C		
					
BODY		INSULATOR	COVER		
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE CENTER CONDUCTOR ON THE CONTACT PIN OF CONNECTOR "A" AND SOLDER IN "Y".			
		Step 3: USE SOLDERING FIXTURE "ST-008", INSERT TOOL "ST-035" AND LOCATOR TOOL "ST-011" TO FIX THE CONNECTOR. SOLDER IN "X".			
		Step 4: PRESS ON THE TOP OF "B" AND "C" WITH JIGS.			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	