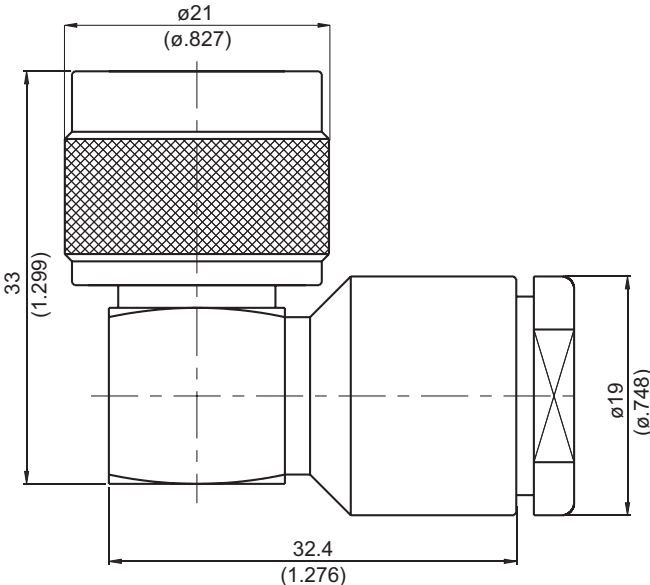


N3200B-9011	N Plug Clamp Right Angle		75Ω																														
																																	
<table><tr><th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr><tr><td>Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Hex Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Washer</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Braid Clamp</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicon</td><td></td></tr><tr><td>Center Pin</td><td>Brass</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr><tr><td>Insulator</td><td>Teflon</td><td></td></tr><tr><td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Coupling Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>				Parts	Material	Plating (Micro-inch)	Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Center Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																															
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Gasket	Silicon																																
Center Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50																															
Insulator	Teflon																																
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																															
Weight:																																	
Suitable Cables: RG11																																	

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3200B-9011

JYE BAO CO., LTD.

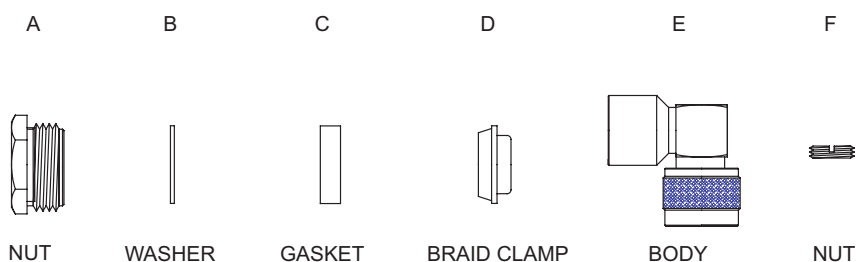


DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP AS SHOWN.
	Step 2: SLIDE "A" "B" "C" "D" OVER CABLE.
	Step 3: WRAP THE BRAIDING OVER "D". Step 4: STRIP THE DIELECTRIC AS SHOWN.
	Step 5: SLIDE PREPARED CABLE INTO CONNECTOR BODY "E" AND SCREW "A" ON THE BODY .
	Step 6: SOLDER IN "Y". Step 7: SCREW "F" ON THE BODY "E".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.