


N3200BA-0011

N Plug Clamp

75Ω

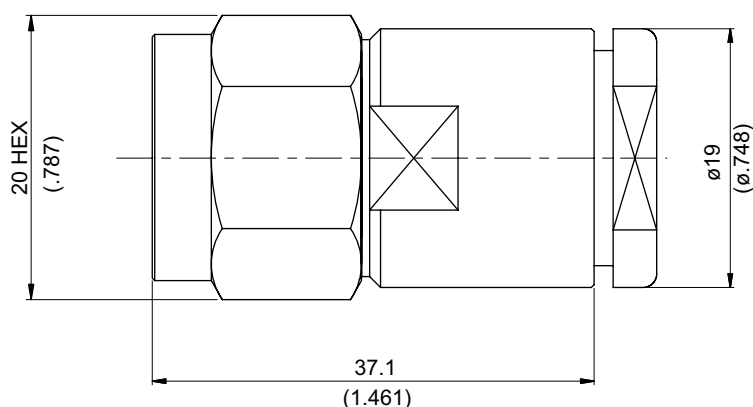

Parts	Material	Plating (Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Top Hat	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

Suitable Cables: RG11

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3200BA-0011

JYE BAO CO., LTD.

N3200BA-0011

DATE

2015/02/05

REV



A

B


C

D


E

F

G



BODY



CONTACT
PIN



WASHER



BRAID
CLAMP



GASKET




WASHER




NUT

DIAGRAM


ASSEMBLY INSTRUCTION

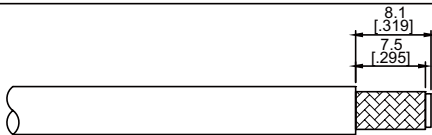


Step 1: STRIP AS SHOWN.

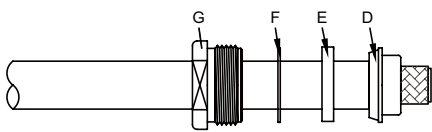


Step 2: SLIDE NUT " G " \ WASHER " F " \ GASKET " E " AND BRAID CLAMP " D " OVER CABLE.

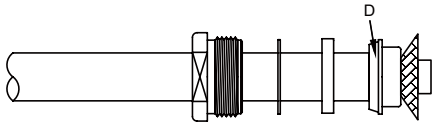


Step 3: WRAP THE BRAIDING OVER " D " .

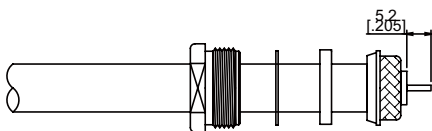

Step 4: STRIP AS SHOWN.



Step 5: PUT WASHER " C " AND CONTACT PIN " B " ON CENTER CONDUCTOR. SOLDER IN " Y " .

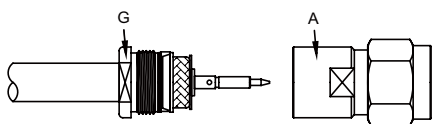

Step 6: FINALLY SCREW NUT " G " ON THE CONNECTOR BODY " A " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.