



N9205BS-L400

**N Reverse Polarity Jack
Clamp For Bulkhead**

50Ω

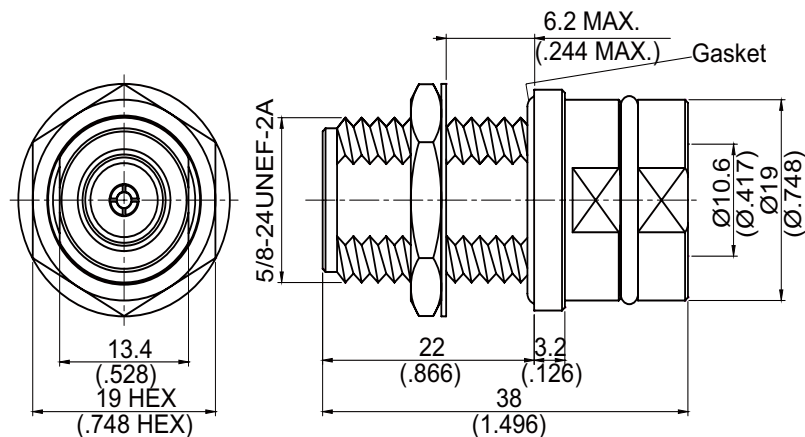

MOUNTING HOLE



Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Nut	Stainless Steel	Passivated
Hex Nut	Stainless Steel	Passivated
Lock Washer	Stainless Steel	Passivated
Contact Pin	Brass	Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:
Suitable Cables: JBY400; LMR400

IP67(Mated)

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N9205BS-L400

JYE BAO CO., LTD.
TAIPEI TAIWAN R.O.C

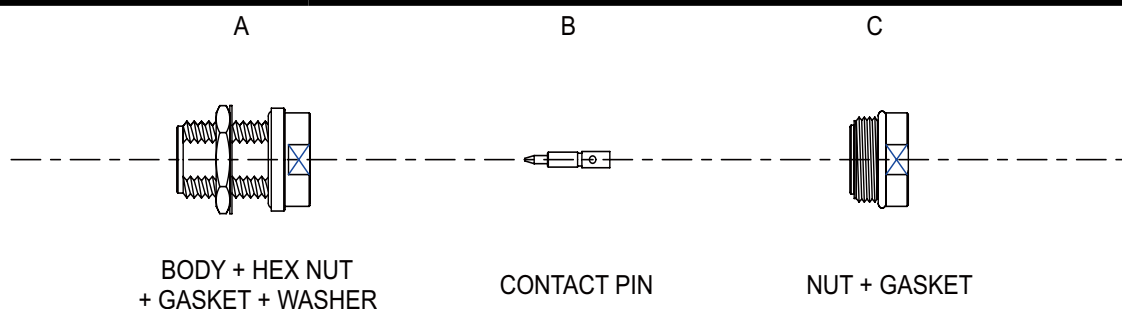

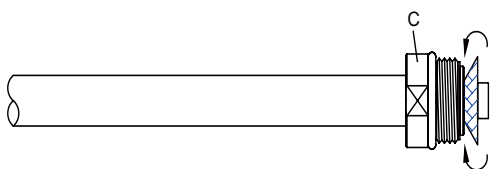
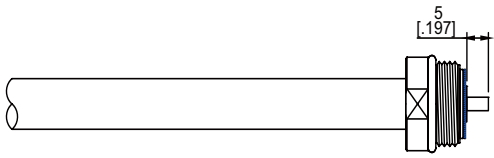
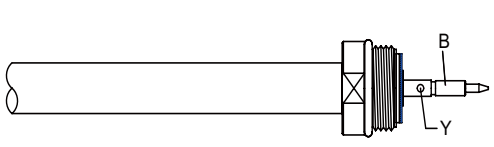
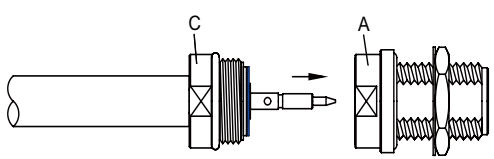


DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP AS SHOWN.
	Step 2: SMEAR LUBRICANT ON INNER GASKET.
	Step 3: SLIDE NUT " C " IN PLACE . Step 4: WRAP THE BRAIDING OVER " C " .
	Step 4: STRIP AS SHOWN.
	Step 5: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y " .
	Step 6: FINALLY SCREW " C " ON THE CONNECTOR BODY " A " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.