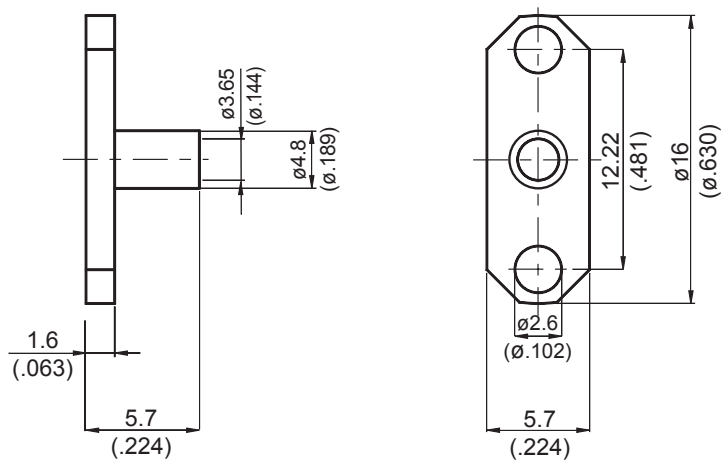


SMA0326-0141

Terminal solder 2 hole flange for RG402



Parts	Material	Plating (Micro-inch)
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 1.09 g


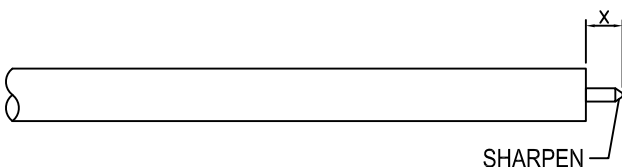
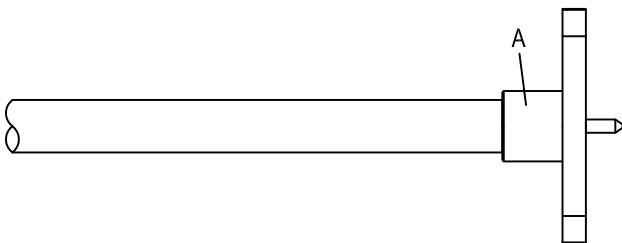
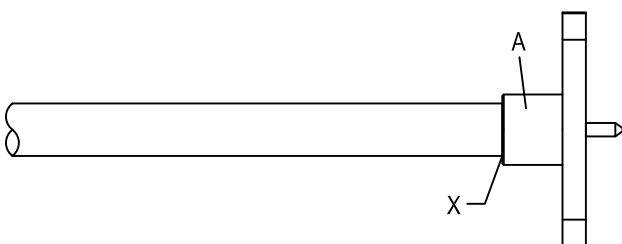
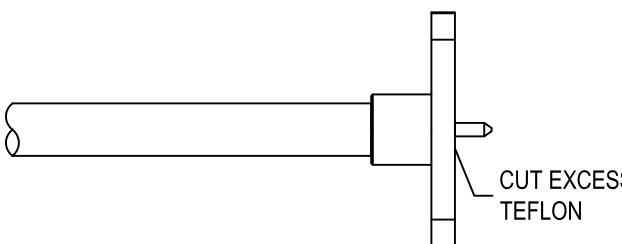
Suitable Cables: Semi-Rigid .141 cable

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SMA0326-0141		DATE	2017/12/01	REV	—
A  BODY					
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN. Step 2: SHARPEN CENTER CONDUCTOR TIP. Note: " X " DEPENDS ON APPLICATION.		
			Step 3: SLIDE CONNECTOR " A " IN PLACE.		
			Step 4: SOLDER IN " Y ".		
			Step 5: CUT AWAY ANY EXCESS TEFLON STICKING OUT OF THE CONNECTOR.		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				<i>Albert</i>	