


NO.	COMPONENTS	IMPEDANCE
1	1.85 MALE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2021/04/15	

1.85 MALE

1.85 MALE

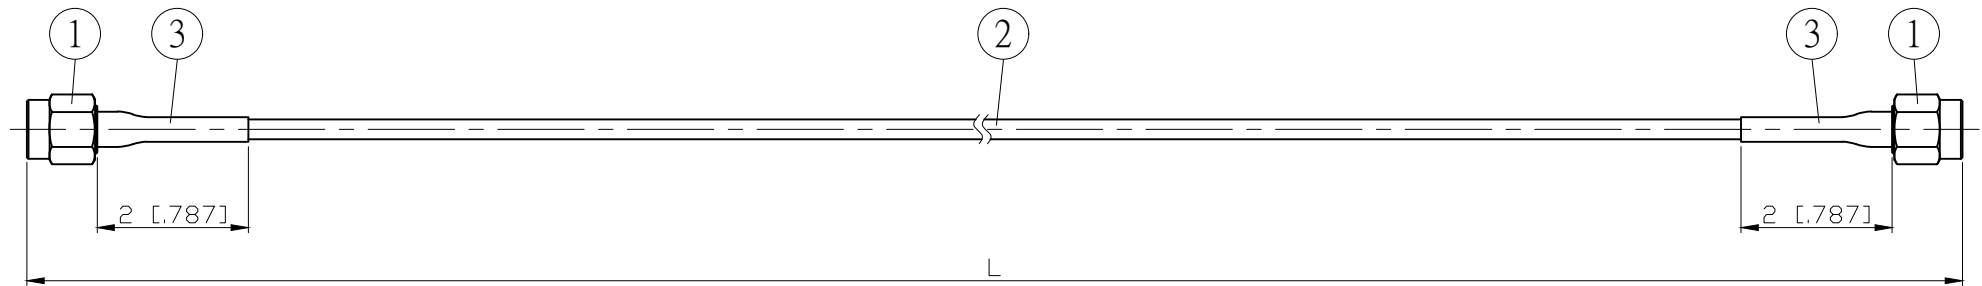

L CM (INCH)	L1 M (MM)
50 (19.685)	0.498 (498.0)
100 (39.370)	0.998 (998.0)
150 (59.055)	1.498 (1498.0)
200 (78.740)	1.998 (1998.0)
Custom length in CM	- - -

Spec	Phase stability vs bending ⁽¹⁾	Amplitude stability vs bending ⁽²⁾	Max VSWR	Max IL	Flexure life cycle ⁽³⁾
3GHz	±0.3° typ / ±0.5° max	±0.005dB typ / ±0.01dB max	1.20 : 1	≤ (0.0128dB/cm*Lcm)+0.15dB	≥ 10000
6GHz	±0.5° typ / ±0.75° max	±0.0075dB typ / ±0.015dB max	1.25 : 1	≤ (0.0189dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75° typ / ±1.0° max	±0.010dB typ / ±0.02dB max	1.30 : 1	≤ (0.0293dB/cm*Lcm)+0.25dB	
18GHz	±1.0° typ / ±1.5° max	±0.015dB typ / ±0.03dB max	1.35 : 1	≤ (0.0361dB/cm*Lcm)+0.30dB	
26.5GHz	±1.5° typ / ±2.0° max	±0.020dB typ / ±0.04dB max	1.35 : 1	≤ (0.0450dB/cm*Lcm)+0.40dB	
40GHz	±2.0° typ / ±3.5° max	±0.030dB typ / ±0.06dB max	1.35 : 1	≤ (0.0568dB/cm*Lcm)+0.50dB	
50GHz	±3.0° typ / ±8.0° max	±0.040dB typ / ±0.08dB max	1.40 : 1	≤ (0.0640dB/cm*Lcm)+0.70dB	
67GHz	±5.0° typ / ±10.0° max	±0.050dB typ / ±0.10dB max	1.40 : 1	≤ (0.0768dB/cm*Lcm)+0.80dB	

Notes:

- Operating Temp.: -55°C / +125°C
- Static bend radius 5.1mm
- Dynamic bend radius 30mm
- RoHS Compliant

- Per IEC 60966-1, section 8.6, method 1
- Per IEC 60966-1, section 8.4
- Per IEC 60966-1, section 9.3

3	G5(F)-4.0MM-BLACK	TUBE	0.04	M	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
2	5002	CABLE	SEE TABLE L1	M		APPROVED	DATE		
1	1.85-33NV-0085	1.85 PLUG	2	EA		CHECKED	DATE		
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M		DRAWING	DATE		
						<i>Albert</i>			DESCRIPTION CABLE ASSEMBLY 1.85 PLUG TO 1.85 PLUG
									JYE BAO DRAWING NO. 18301830-52L-67GXXX