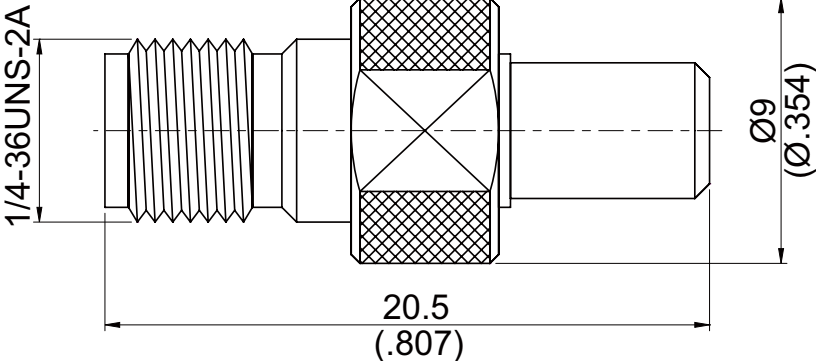


AD-A8SB3	SMA Jack To SSMB Plug 4GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Retainer Ring	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Weight:			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8SB3	SMA Jack To SSMB Plug 4GHz VSWR 1.2															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">SSMB</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>MIL-STD-348B</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	SSMB	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5										
SMA	SSMB															
MIL-STD-348B	MIL-STD-348B															
2.92 & 3.5																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;"></td> </tr> <tr> <td>DC To 4GHz</td> <td></td> </tr> <tr> <td>≤ 1.2 (DC To 4GHz)</td> <td></td> </tr> <tr> <td>≤ 0.03 x √f(GHz) dB</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>500 V rms</td> <td></td> </tr> <tr> <td>275 V rms</td> <td></td> </tr> </tbody> </table>		50Ω		DC To 4GHz		≤ 1.2 (DC To 4GHz)		≤ 0.03 x √f(GHz) dB		≥ 5000MΩ		500 V rms		275 V rms	
50Ω																
DC To 4GHz																
≤ 1.2 (DC To 4GHz)																
≤ 0.03 x √f(GHz) dB																
≥ 5000MΩ																
500 V rms																
275 V rms																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">SSMB</th> </tr> </thead> <tbody> <tr> <td>4 in-lbs</td> <td>NA</td> </tr> <tr> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>NA</td> <td>1.8 to 6.1 lbs</td> </tr> <tr> <td>NA</td> <td>1.8 to 6.1 lbs</td> </tr> <tr> <td>≥ 6.1 lbs</td> <td>≥ 1.8 lbs</td> </tr> <tr> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>		SMA	SSMB	4 in-lbs	NA	5.3 in-lbs	NA	NA	1.8 to 6.1 lbs	NA	1.8 to 6.1 lbs	≥ 6.1 lbs	≥ 1.8 lbs	≥ 100	≥ 500
SMA	SSMB															
4 in-lbs	NA															
5.3 in-lbs	NA															
NA	1.8 to 6.1 lbs															
NA	1.8 to 6.1 lbs															
≥ 6.1 lbs	≥ 1.8 lbs															
≥ 100	≥ 500															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-65°C to +165°C</td> <td style="width: 50%;"></td> </tr> <tr> <td>MIL-STD-202, Method 107, Condition B</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 206</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 101, Condition B</td> <td></td> </tr> <tr> <td>Compliant</td> <td></td> </tr> </tbody> </table>		-65°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant					
-65°C to +165°C																
MIL-STD-202, Method 107, Condition B																
MIL-STD-202, Method 206																
MIL-STD-202, Method 101, Condition B																
Compliant																

Notice: JYEBAO reserves the right to make modifications deemed appropriate.