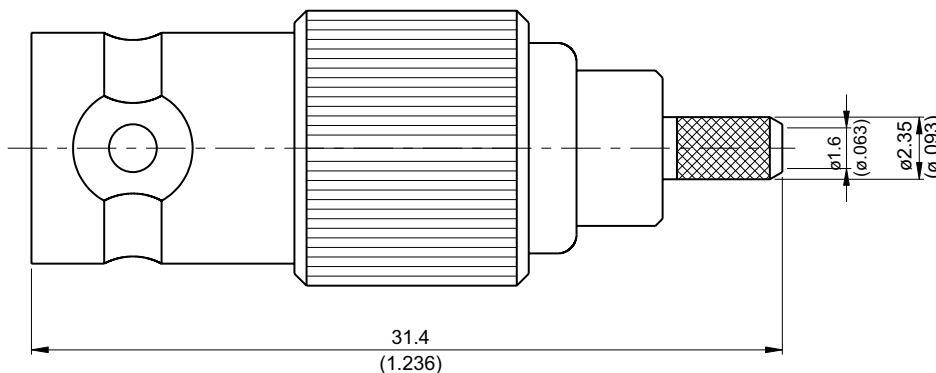


BNC8100-0316

BNC jack crimp for RG174,RG188,RG316; 50Ω
2.5GHz VSWR 1.2



Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 10.46 g

Suitable Cables: RG174, RG188, RG316, RG316-FEP

This part number complies with RoHS.


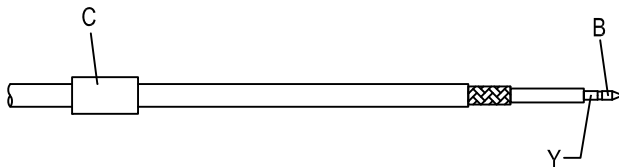
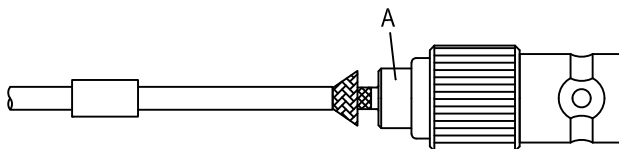
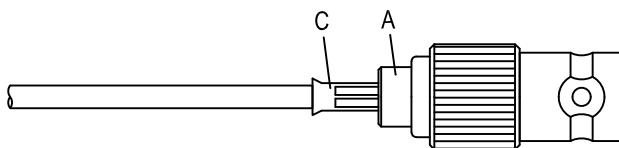
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

BNC	BNC8100-0316
Interface MIL-STD-348B	
Electrical Data Impedance Frequency range VSWR Insertion loss Insulation resistance Contact resistance inner conductor Contact resistance outer conductor Dielectric withstanding voltage (at sea level) Working voltage (at sea level) 50Ω DC to 2.5GHz ≤ 1.2 (DC to 2.5GHz) $\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB $\geq 5000\text{M}\Omega$ $\leq 1.5\text{m}\Omega$ $\leq 1\text{m}\Omega$ 1500 V rms 500 V rms	
Mechanical Data Recommended coupling nut torque Contact captivation-axial Durability (mating) 0.6 to 2.5 inch lbs ≥ 6.1 lbs ≥ 500	
Environmental Data Temperature range Thermal shock Moisture resistance Corrosion RoHS -65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 106 MIL-STD-202, Method 101, Condition B Compliant	
Tooling Crimping tool Crimp insert CRT-1 or CRT-2 INSERT-A	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

BNC8100-0316		DATE	2017/02/02	REV	—
A		B		C	
					
BODY		SMALL PIN		FERRULE	
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND CRIMP IN " Y ". (USE SQUARE 0.7mm/0.028inch SECTION OF INSERT-A)		
			Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.		
			Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 3.3mm/0.130inch HEX SECTION OF INSERT-A)		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

BNC8100-0316

S11

