


FAT-FM7FF7T3G2W16

3GHz F Plug To F Jack Fixed Attenuator 75Ω

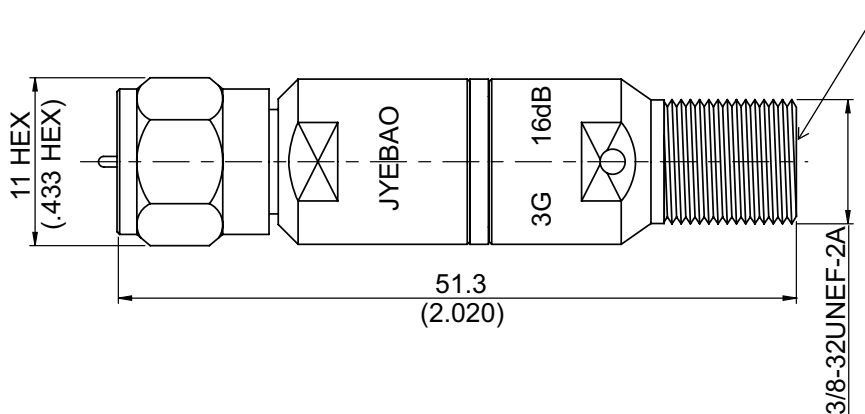

Nominal impedance: 75Ω±0.25Ω .

Frequency range: DC to 3GHz.

VSWR deviation: ±0.1% over operating temperature range.

Rated Power: 250 mW

Operating Temp Range: -55 to 120°C.

Attenuation	VSWR	Attenuation deviation (+/-dB)	
	DC-3GHz	DC-2GHz	2-3GHz
16dB	≤1.3	+/-0.5dB	+/-3dB

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(Jack)	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.