


**FAT-NM5B95T3G2W3**

**3GHz N Plug To BNC Reverse Polarity Jack Fixed Attenuator**

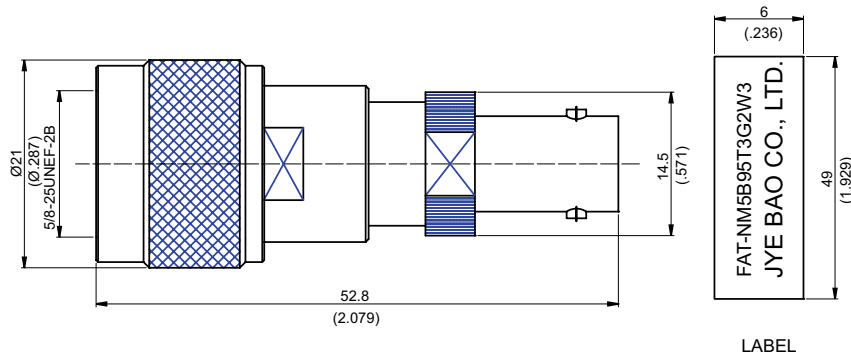

- Nominal impedance: 50Ω+/-0.25Ω over operating temperature range.
- Operating temperature range: -50 degrees Celcius to +80 degrees Celcius.
- VSWR deviation: +/-0.1% over operating temperature range.
- Power rating: 2W over operating temperature range.
- Power Rating (Peak): 100W for 25 Microseconds.
- Power Coefficient: 0.001dB/W (change in attenuation with increase in power).
- Temperature Coefficient: 0.001dB/Deg. C max., 0.0003dB/Deg.C typ.

Attenuation	VSWR		Attenuation deviation (+/-dB)	
	DC-2GHz	2-3GHz	DC-2GHz	2-3GHz
3dB	≤1.1	≤1.25	+/-0.2dB	+/-0.3dB

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(BNC)	Phosphor Bronze	Gold 10 Over Nickel 50 Over Copper 50
Renbrock Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin(N)	Brass	Gold 10 Over Nickel 50 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

**This part number complies with RoHS.**

**Notice: JYEBAO reserves the right to make modifications deemed appropriate.**