

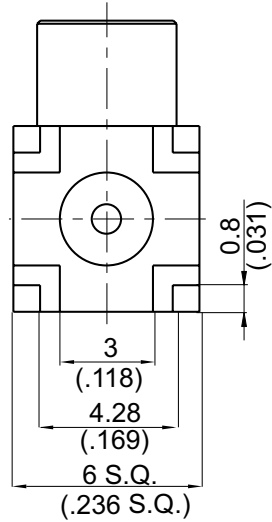



MCX8410-9000 **MCX Jack PCB Surface Mount Right Angle** **50Ω**
With Round Contact (Φ0.95); 6GHz VSWR 1.2

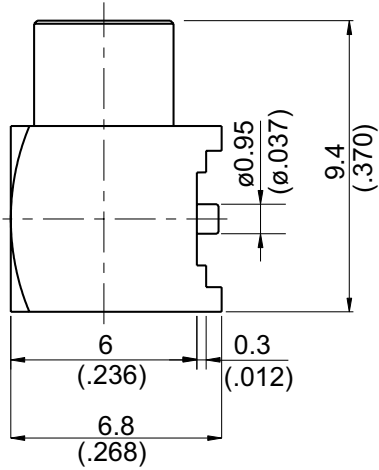

Tape & Reel PACKAGING
(500pc/reel)

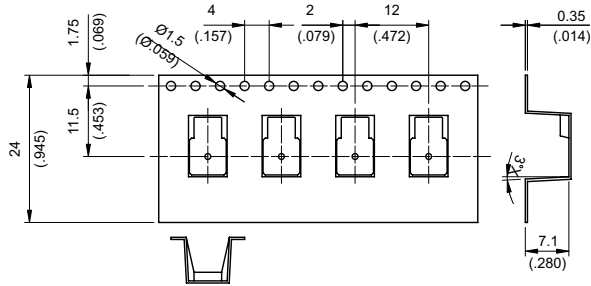

MOUNTING HOLE :

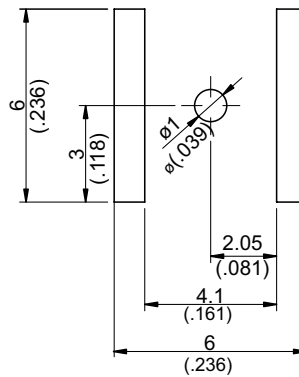

Parts	Material	Plating (Micro-inch)
Cover	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 1.58 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MCX	MCX8410-9000																		
<div data-bbox="167 344 569 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="167 400 367 434">IEC 61169-36</p>																			
<div data-bbox="167 510 569 560" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" data-bbox="167 566 1356 985"> <tr> <td>Impedance</td> <td>50Ω</td> </tr> <tr> <td>Frequency range</td> <td>DC to 6GHz</td> </tr> <tr> <td>VSWR</td> <td>≦1.2 (DC to 6GHz)</td> </tr> <tr> <td>Insertion loss</td> <td>≦0.1dB to 1GHz; ≦0.15 to 3GHz</td> </tr> <tr> <td>Insulation resistance</td> <td>≧10000mΩ</td> </tr> <tr> <td>Contact resistance inner conductor</td> <td>≦5mΩ</td> </tr> <tr> <td>Contact resistance outer conductor</td> <td>≦2.5mΩ</td> </tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td> <td>750 V rms</td> </tr> <tr> <td>Working voltage (at sea level)</td> <td>250 V rms</td> </tr> </table>		Impedance	50Ω	Frequency range	DC to 6GHz	VSWR	≦1.2 (DC to 6GHz)	Insertion loss	≦0.1dB to 1GHz; ≦0.15 to 3GHz	Insulation resistance	≧10000mΩ	Contact resistance inner conductor	≦5mΩ	Contact resistance outer conductor	≦2.5mΩ	Dielectric withstanding voltage (at sea level)	750 V rms	Working voltage (at sea level)	250 V rms
Impedance	50Ω																		
Frequency range	DC to 6GHz																		
VSWR	≦1.2 (DC to 6GHz)																		
Insertion loss	≦0.1dB to 1GHz; ≦0.15 to 3GHz																		
Insulation resistance	≧10000mΩ																		
Contact resistance inner conductor	≦5mΩ																		
Contact resistance outer conductor	≦2.5mΩ																		
Dielectric withstanding voltage (at sea level)	750 V rms																		
Working voltage (at sea level)	250 V rms																		
<div data-bbox="167 1057 569 1106" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="0" data-bbox="167 1113 1037 1288"> <tr> <td>Engagement force</td> <td>≦5.6 lbs</td> </tr> <tr> <td>Disengagement force</td> <td>1.8 to 4.5 lbs</td> </tr> <tr> <td>Contact captivation-axial</td> <td>≧2.3 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≧500</td> </tr> </table>		Engagement force	≦5.6 lbs	Disengagement force	1.8 to 4.5 lbs	Contact captivation-axial	≧2.3 lbs	Durability (mating)	≧500										
Engagement force	≦5.6 lbs																		
Disengagement force	1.8 to 4.5 lbs																		
Contact captivation-axial	≧2.3 lbs																		
Durability (mating)	≧500																		
<div data-bbox="167 1361 569 1411" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" data-bbox="167 1417 1420 1646"> <tr> <td>Temperature range</td> <td>-55°C to +155°C</td> </tr> <tr> <td>Thermal shock</td> <td>MIL-STD-202, Method 107, Condition F</td> </tr> <tr> <td>Moisture resistance</td> <td>MIL-STD-202, Method 106</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table>		Temperature range	-55°C to +155°C	Thermal shock	MIL-STD-202, Method 107, Condition F	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-55°C to +155°C																		
Thermal shock	MIL-STD-202, Method 107, Condition F																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
<div data-bbox="167 1715 569 1765" style="border: 1px solid black; padding: 2px;">Tooling</div>																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MCX8410-9000

S11

