



N9205BS-L600

**N Reverse Polarity Jack Clamp For Bulkhead 50Ω**

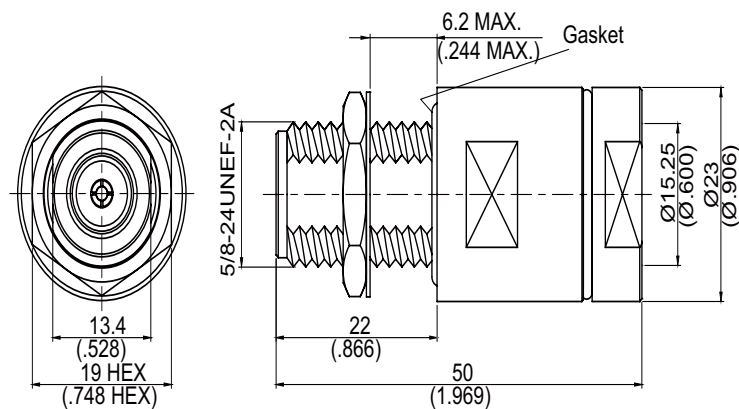

**MOUNTING HOLE**



| Parts       | Material        | Plating (Micro-inch)                                   |
|-------------|-----------------|--------------------------------------------------------|
| Gasket      | Silicon         |                                                        |
| Nut         | Stainless Steel | Passivated                                             |
| Hex Nut     | Stainless Steel | Passivated                                             |
| Lock Washer | Stainless Steel | Passivated                                             |
| Contact Pin | Brass           | Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20 |
| Insulator   | Teflon          |                                                        |
| Body        | Stainless Steel | Passivated                                             |

Weight:  
Suitable Cables: JBY600, LMR600

IP67(Mated)


**This part number complies with RoHS.**

**Notice: JYEBAO reserves the right to make modifications deemed appropriate.**

## CABLE ASSEMBLY INSTRUCTION

N9205BS-L600

JYE BAO CO., LTD.  
TAIPEI TAIWAN R.O.C

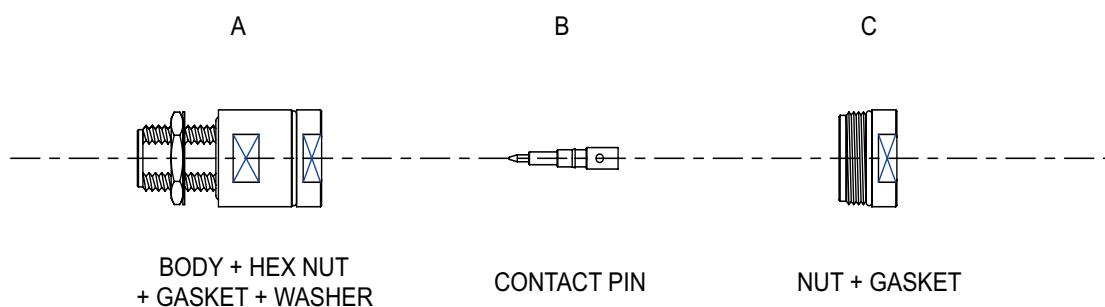

| DIAGRAM | ASSEMBLY INSTRUCTION                                                    |
|---------|-------------------------------------------------------------------------|
|         | Step 1: STRIP AS SHOWN.                                                 |
|         | Step 2: SMEAR LUBRICANT ON INNER GASKET.                                |
|         | Step 3: SLIDE NUT "C" IN PLACE .<br>Step 4: WRAP THE BRAIDING OVER "C". |
|         | Step 4: STRIP AS SHOWN.                                                 |
|         | Step 5: PUT PIN "B" ON CENTER CONDUCTOR AND<br>SOLDER IN "Y".           |
|         | Step 6: FINALLY SCREW "C" ON THE CONNECTOR<br>BODY "A".                 |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.