


OSL-SMA-F-6G

SMA Jack 50ohm Open Short Load 6GHz 50Ω

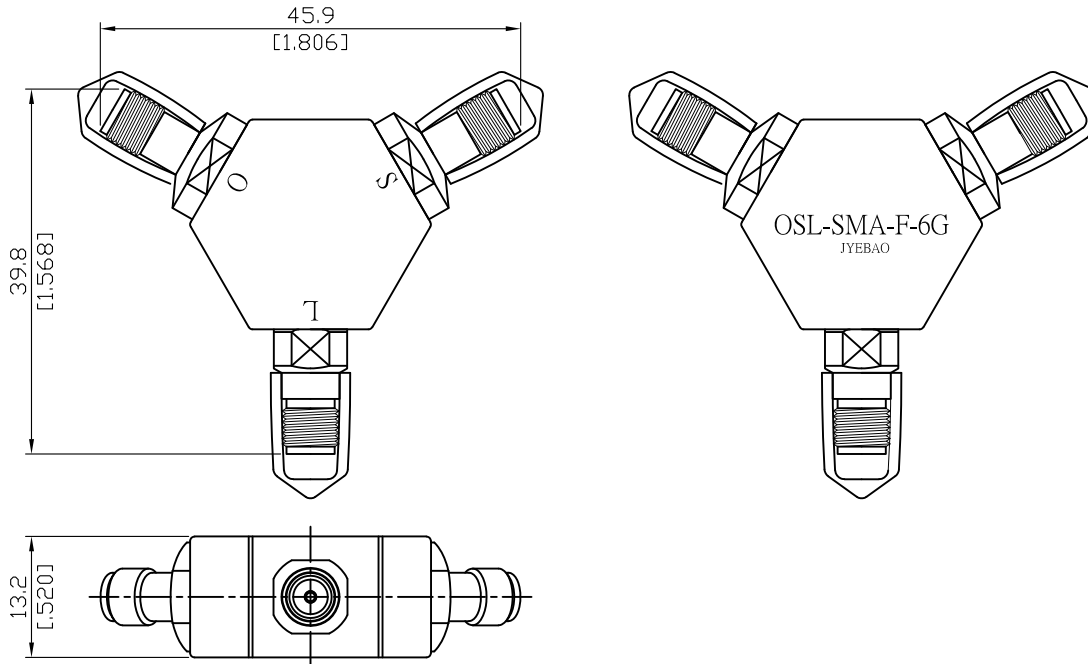

OPEN				SHORT					
Frequency Range	DC-6GHz			Frequency Range	DC-6GHz				
Impedance	50Ω			Impedance	50Ω				
Offset length	Agilent	Anritsu	Rohde&Schwarz	Offset length	Agilent	Anritsu	Rohde&Schwarz		
	16.70ps	5.01mm	5.01mm		16.70ps	5.01mm	5.01mm		
Capacitance	Agilent/Anritsu		Rohde&Schwarz	Inductance	Agilent/Anritsu		Rohde&Schwarz		
	C0	(1E-15) F	5.000 fF		5.0000000	L0	(1E-12) H	8.000 pH	8.0000000
C1	(1E-27) F/Hz	0.000	fF/GHz	0.0000000	L1	(1E-24) H/Hz	-995.000	pH/GHz	-0.9950000
C2	(1E-36) F/Hz ²	1.500	fF/GHz ²	0.0015000	L2	(1E-33) H/Hz ²	33.000	pH/GHz ²	0.0330000
C3	(1E-45) F/Hz ³	0.100	fF/GHz ³	0.0001000	L3	(1E-42) H/Hz ³	-0.290	pH/GHz ³	-0.0002900
Phase Error				Phase Error					
DC-6GHz	≤1°			DC-6GHz	≤1°				
Return Loss				Return Loss					
DC-6GHz	≤0.10dB			DC-6GHz	≤0.10dB				

Load	
Frequency Range	DC-6GHz
Impedance	50Ω
DC Resistance	50 ± 0.50Ω
Max Power	0.25W
Return Loss DC-6GHz	≥ 42dB

Notes:

1. Temperature range for optimal results: +20 °C to +26 °C
2. Storage temperature range: -20 °C to +75 °C
3. When not in use put on cap to keep connector clean
4. Return loss test results shipped along with goods (example below)


Parts	Material	Plating (Micro-inch)
Housing	Aluminium	Anodized (Green)
Cap	PVC	
Body open/short/load	Stainless Steel	Passivated
Contact pin open/short/load	Beryllium Copper	Gold 4 Over Nickel Phosphorous Alloy 80 Over Copper 20
Dielectric	Teflon	

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

OSL-SMA-F-6G

OPEN return loss & phase error

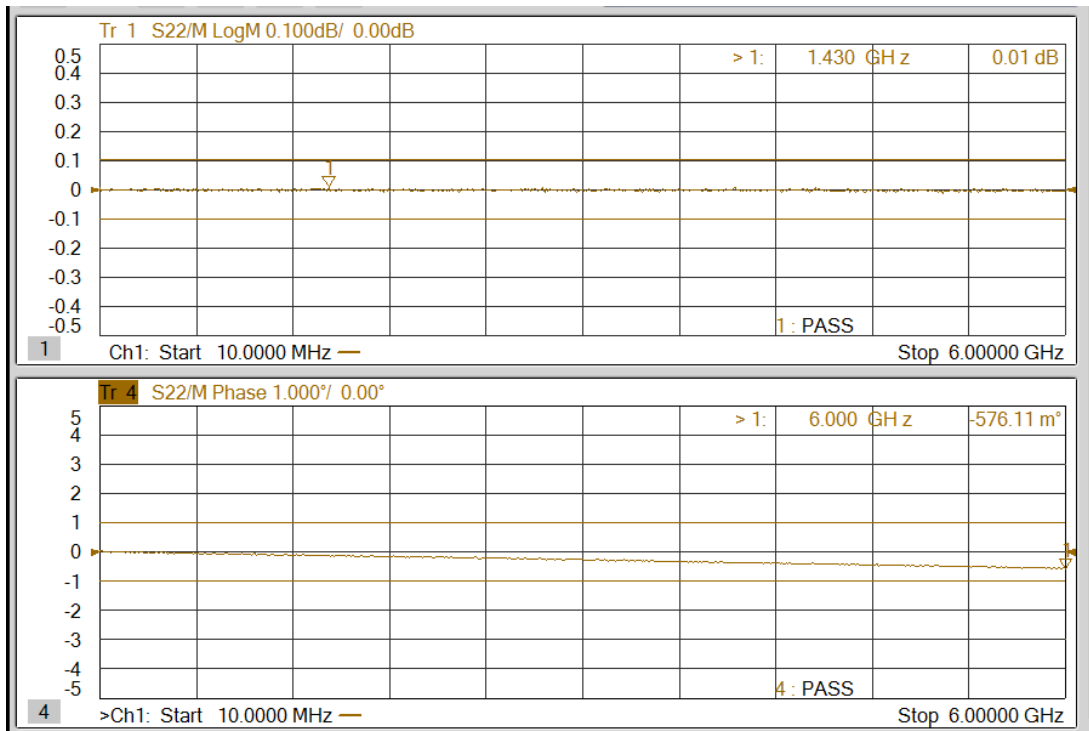

SHORT return loss & phase error

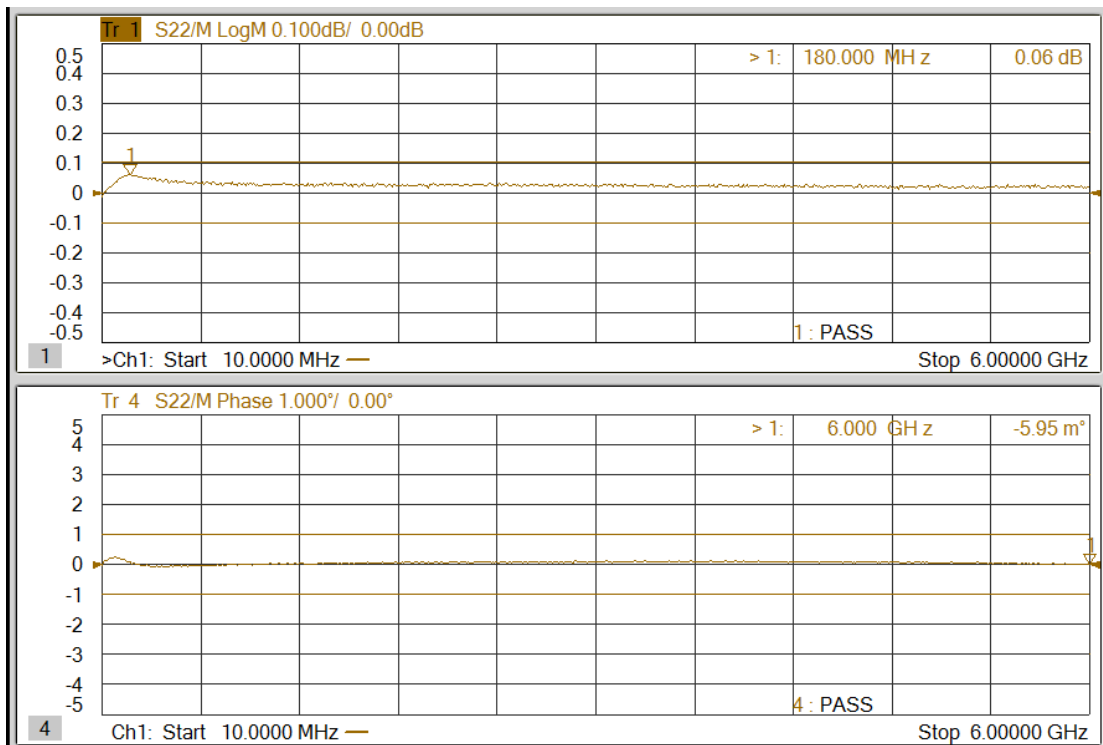

LOAD return loss

