


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	
4	SMPM FEMALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMP FEMALE

SMPM FEMALE

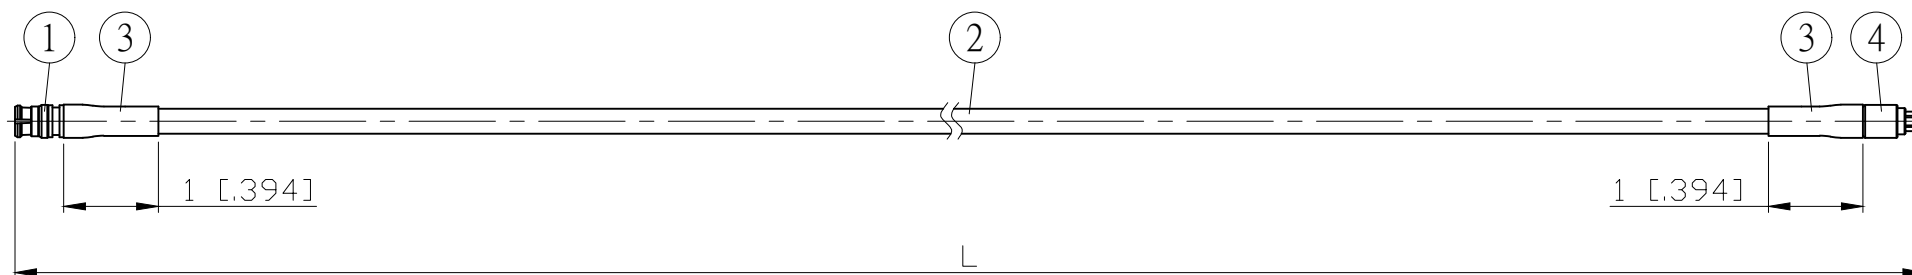

L CM (INCH)	L1 M (MM)
50 (19.685)	0.493 (492.5)
100 (39.370)	0.993 (992.5)
150 (59.055)	1.493 (1492.5)
200 (78.740)	1.993 (1992.5)
Custom length in CM	- - -

Spec	Phase stability vs bending <sup>(1)</sup>	Amplitude stability vs bending <sup>(2)</sup>	Max VSWR	Max IL	Flexure life cycle <sup>(3)</sup>
3GHz	±0.3° typ / ±0.5° max	±0.005dB typ / ±0.01dB max	1.20 : 1	≤ (0.0128dB/cm*Lcm)+0.15dB	≥ 10000
6GHz	±0.5° typ / ±0.75° max	±0.0075dB typ / ±0.015dB max	1.25 : 1	≤ (0.0189dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75° typ / ±1.0° max	±0.010dB typ / ±0.02dB max	1.30 : 1	≤ (0.0293dB/cm*Lcm)+0.25dB	
18GHz	±1.0° typ / ±1.5° max	±0.015dB typ / ±0.03dB max	1.30 : 1	≤ (0.0361dB/cm*Lcm)+0.30dB	
27GHz	±1.5° typ / ±2.0° max	±0.020dB typ / ±0.04dB max	1.35 : 1	≤ (0.0450dB/cm*Lcm)+0.40dB	

Notes:

- Operating Temp.: -55°C / +125°C
- Static bend radius 5.1mm
- Dynamic bend radius 30mm
- RoHS Compliant

- Per IEC 60966-1, section 8.6, method 1
- Per IEC 60966-1, section 8.4
- Per IEC 60966-1, section 9.3

					STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
					APPROVED		DATE	
					CHECKED		DATE	
					DRAWING	<i>Albert</i>	DATE	
4	SMPM8300-0085	SMPM JACK	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.			DESCRIPTION
3	G5(F)-4.0MM-BLACK	TUBE	0.03	M				CABLE ASSEMBLY SMP JACK TO SMPM JACK
2	5002	CABLE	SEE TABLE L1	M				JYE BAO DRAWING NO.
1	SMP8300-0085	SMP JACK	1	EA				P80PM80-52L-27GXXX
NO.	PARTS NO.	DESCRIPTION	QTY	U/M				