


NO.	COMPONENTS	IMPEDANCE
1	3.5 MALE	50 OHM
2	PHASETEST2	50 OHM
3	SLEEVE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/10/30	

3.5 MALE

3.5 MALE

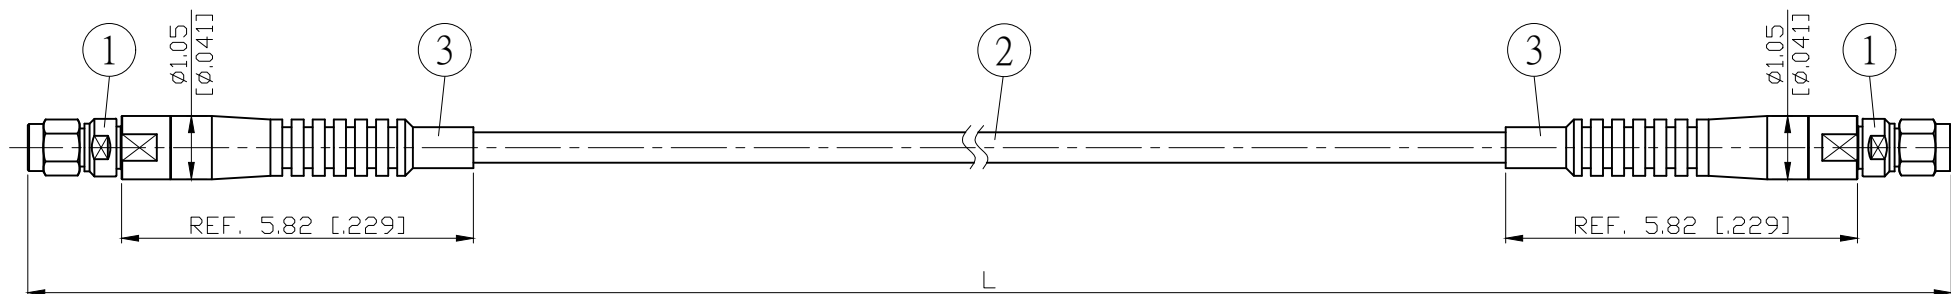

L CM (INCH)	L1 M (MM)
50 (19.685)	0.477 (476.5)
100 (39.370)	0.977 (976.5)
150 (59.055)	1.477 (1476.5)
200 (78.740)	1.977 (1976.5)
Custom length in CM	- - -

Spec	Phase stability vs bending ⁽¹⁾	Amplitude stability vs bending ⁽²⁾	Max VSWR	Max IL	Flexure life cycle ⁽³⁾ (50.8mm dynamic bend radius): ≥ 100000
3GHz	±0.3° typ / ±0.5° max	±0.005dB typ / ±0.01dB max	1.12 : 1	< (0.0128dB/cm*Lcm)+0.25dB	
6GHz	±0.5° typ / ±0.75° max	±0.0075dB typ / ±0.015dB max	1.15 : 1	< (0.0189dB/cm*Lcm)+0.3dB	
12.4GHz	±0.75° typ / ±1.0° max	±0.01dB typ / ±0.02dB max	1.20 : 1	< (0.0293dB/cm*Lcm)+0.35dB	
18GHz	±1.0° typ / ±1.5° max	±0.015dB typ / ±0.03dB max	1.25 : 1	< (0.0361dB/cm*Lcm)+0.4dB	
26.5GHz	±1.5° typ / ±2.0° max	±0.02dB typ / ±0.04dB max	1.25 : 1	< (0.0450dB/cm*Lcm)+0.45dB	

Notes:

- Operating Temp.: -55°C / +85°C
- Static bend radius 25.4mm
- Dynamic bend radius 50.8mm
- RoHS Compliant

- Per IEC 60966-1, section 8.6, method 1
- Per IEC 60966-1, section 8.4
- Per IEC 60966-1, section 9.3

3	U-PT2	SLEEVE	2	EA
2	PHASETEST2	CABLE	SEE TABLE L1	M
1	U-3.5-M	3.5 PLUG	2	EA
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV	-	UNIT	CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN	
	APPROVED						DATE
	CHECKED						DATE
	DRAWING	<i>Albert</i>					DATE
DESCRIPTION						CABLE ASSEMBLY 3.5 PLUG TO 3.5 PLUG	
JYE BAO DRAWING NO.						PC30PC30-PT2-26.5GX XX	