


NO.	COMPONENTS	IMPEDANCE
1	3.5 MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	3.5 FEMALE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2021/03/23	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

3.5 MALE

3.5 FEMALE

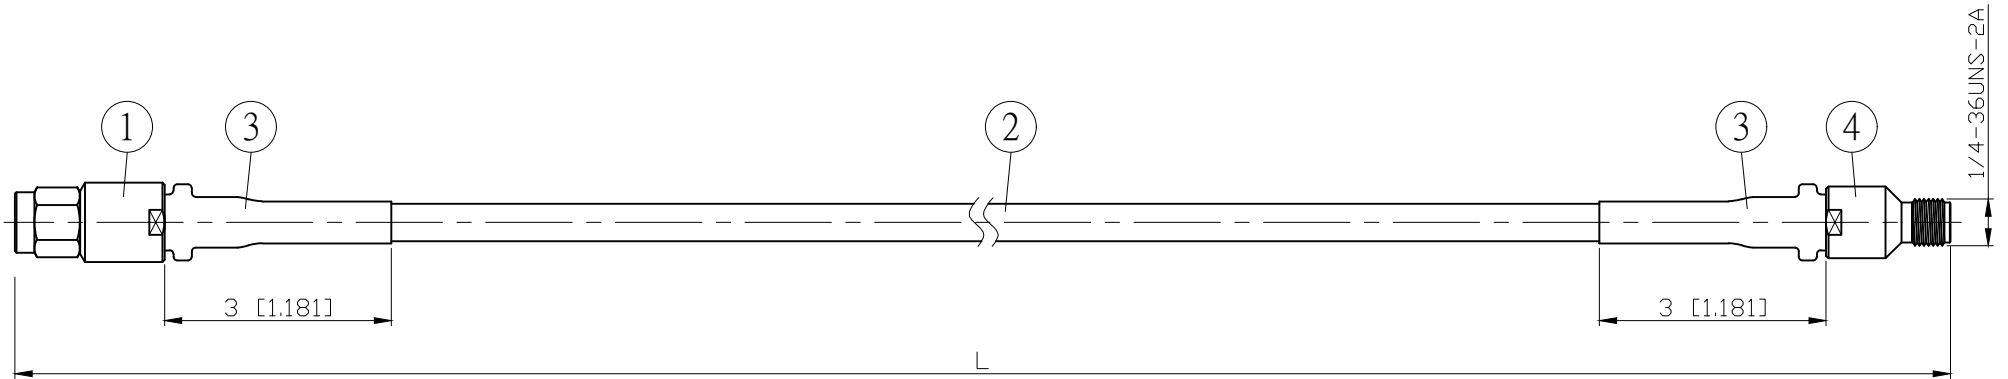

L CM (INCH)	L1 M (MM)
50 (19.685)	0.480 (480.0)
100 (39.370)	0.980 (980.0)
150 (59.055)	1.480 (1480.0)
200 (78.740)	1.980 (1980.0)
Custom length in CM	- - -

Spec	Phase stability vs bending ⁽¹⁾	Amplitude stability vs bending ⁽²⁾	Max VSWR	Max IL	Flexure life cycle ⁽³⁾
3GHz	±0.3° typ / ±0.5° max	±0.01dB typ / ±0.02dB max	1.15 : 1	≤ (0.0055dB/cm*Lcm)+0.15dB	≥ 10000
6GHz	±0.5° typ / ±1.0° max	±0.02dB typ / ±0.04dB max	1.20 : 1	≤ (0.0075dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75° typ / ±1.5° max	±0.03dB typ / ±0.05dB max	1.25 : 1	≤ (0.0106dB/cm*Lcm)+0.25dB	
18GHz	±1.0° typ / ±2.0° max	±0.05dB typ / ±0.10dB max	1.30 : 1	≤ (0.0132dB/cm*Lcm)+0.30dB	
26.5GHz	±1.5° typ / ±3.0° max	±0.10dB typ / ±0.15dB max	1.40 : 1	≤ (0.0155dB/cm*Lcm)+0.40dB	

Notes:

- Operating Temp.: -55°C / +105°C
- Static bend radius 16mm
- Dynamic bend radius 70mm
- RoHS Compliant

- (1) Per IEC 60966-1, section 8.6, method 1
- (2) Per IEC 60966-1, section 8.4
- (3) Per IEC 60966-1, section 9.3

NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M
4	PC3.5-8200S-5005	3.5 JACK	1	EA
3	G5(F)-10MM-BLACK	TUBE	0.06	M
2	5005	CABLE	SEE TABLE L1	M
1	PC3.5-3200S-5005	3.5 PLUG	1	EA

LENGTH TOLERANCE
IS ±1.5% OR ±10MM,
WHICHEVER IS
GREATER.

STANDARD	REV	UNIT CM(INCH)	JYE BAO CO., LTD.	
	-		TAIPEI TAIWAN	
APPROVED		DATE	DESCRIPTION	
CHECKED		DATE	CABLE ASSEMBLY 3.5 PLUG TO 3.5 JACK	
DRAWING		DATE	JYE BAO DRAWING NO.	
<i>Albert</i>			PC30PC80-5005-26.5GX XX	